

PI85T with socket GZT80-V0

railroad interface relays

RM85 + GZT80-V0



- 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw
- Compliance with standards: EN 45545-2 (category EL10, requirement R26 - flammability class V-0 as per EN 60695-11-10); EN 61373:2011 category 1, class B (mechanical shock and vibration resistance); EN 50155:2007; EN 60077-1; EN 61810-1
- Recognitions, certifications, directives: recognitions RM85, RoHS,



Contact data

Number and type of contacts	1 CO
Contact material	AgSnO₂
Rated / max. switching voltage	AC 250 V / 300 V
Min. switching voltage	10 V
Rated load (capacity)	AC1 16 A / 250 V AC ①
	AC15 3 A / 120 V 1,5 A / 240 V (B300)
	DC1 16 A / 24 V DC (see Fig. 3)
	DC13 0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508 1/2 HP 240 V AC, 4,9 FLA, single-phase motor ②
	AC3 acc. to IEC 60947-4-1 0,5 kW 240 V AC, single-phase motor
Min. switching current	10 mA
Max. inrush current	30 A
Rated current	16 A
Max. breaking capacity	AC1 4 000 VA
Min. breaking capacity	1 W
Contact resistance	≤ 100 mΩ 1 A, 24 V
Max. operating frequency	
• at rated load	AC1 600 cycles/hour
• no load	72 000 cycles/hour

Coil data

Rated voltage	DC 24, 110 V ③
Must release voltage	≥ 0,1 U _n
Operating range of supply voltage	0,7...1,25 U _n EN 50155:2007 see Table 1
Must operate voltage	≤ 0,7 U _n
Rated power consumption	DC 0,4 ... 0,48 W

Insulation according to EN 60664-1

Insulation rated voltage	250 V AC
Rated surge voltage	4 000 V 1,2 / 50 μs
Overvoltage category	III
Insulation pollution degree	3
Flammability class	V-0 UL 94, EN 60695-11-10
Dielectric strength	
• between coil and contacts	5 000 V AC type of insulation: reinforced
• contact clearance	1 000 V AC type of clearance: micro-disconnection
Contact - coil distance	
• clearance	≥ 10 mm
• creepage	≥ 10 mm


General data

Operating / release time (typical values)	7 ms / 3 ms
Electrical life	
• resistive AC1	> 0,7 x 10 ⁵ 16 A, 250 V AC
• cosφ	see Fig. 2
• DC L/R=40 ms	> 10 ⁵ 0,12 A, 220 V DC
Mechanical life (cycles)	> 3 x 10 ⁷
Dimensions (L x W x H)	80 x 15,6 x 61 mm
Weight	62 g
Ambient temperature	• storage -40...+85 °C
(non-condensation and/or icing)	• operating -40...+55 °C
Cover protection category	IP 20 EN 60529
Environmental protection	RM85: RTII GZT80-V0: RT0 EN 61810-7
Shock / vibration resistance	category 1, class B EN 61373:2011 (set: relay in socket with clip and module)

The data in bold type relate to the standard versions of the relays. ① Loads above 12 A require bridging pairs of screw terminals: 11 with 21, 12 with 22, 14 with 24 - see page 2. ② For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC. ③ For other voltages contact Relpol S.A., please.


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

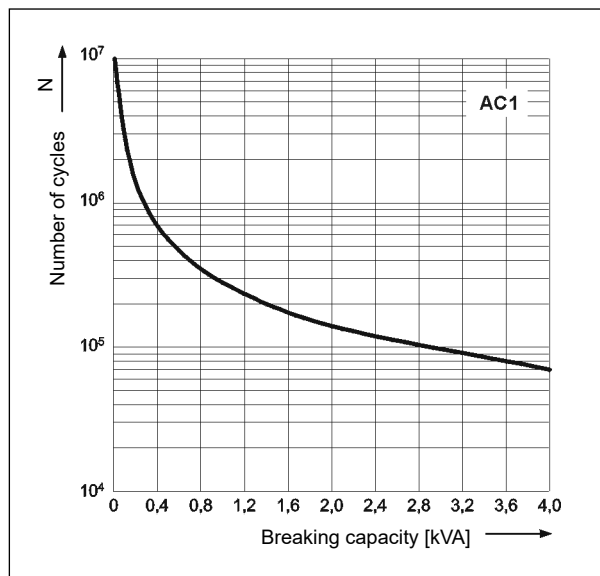


Electrical life reduction factor at AC inductive load

Fig. 2

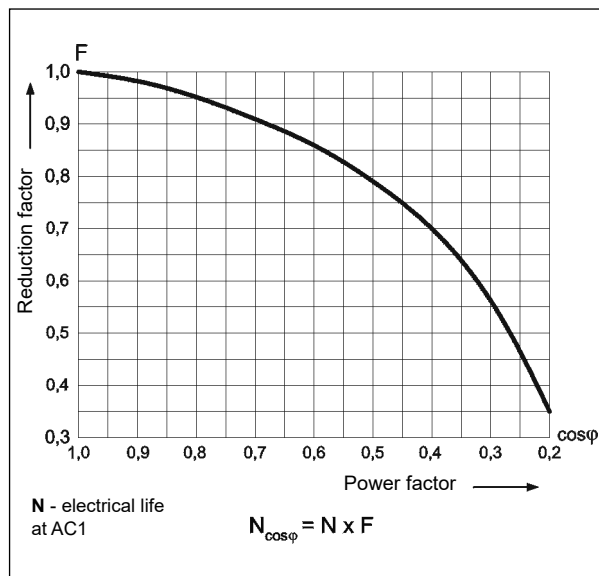


Max. DC resistive load breaking capacity

Fig. 3

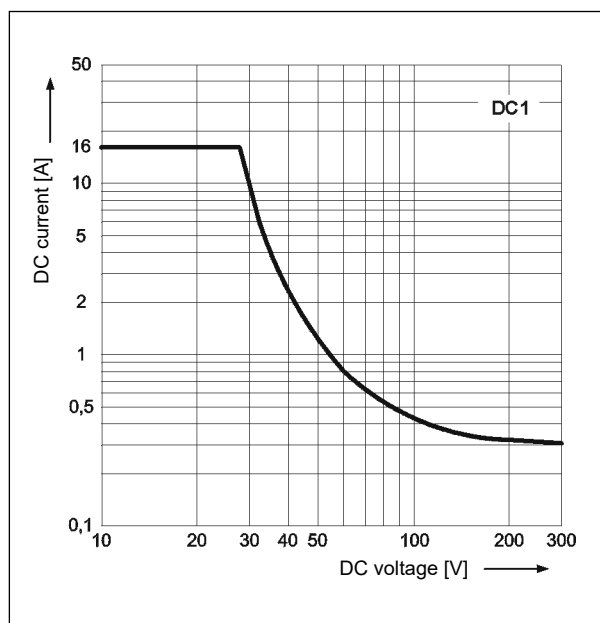

Dimensions

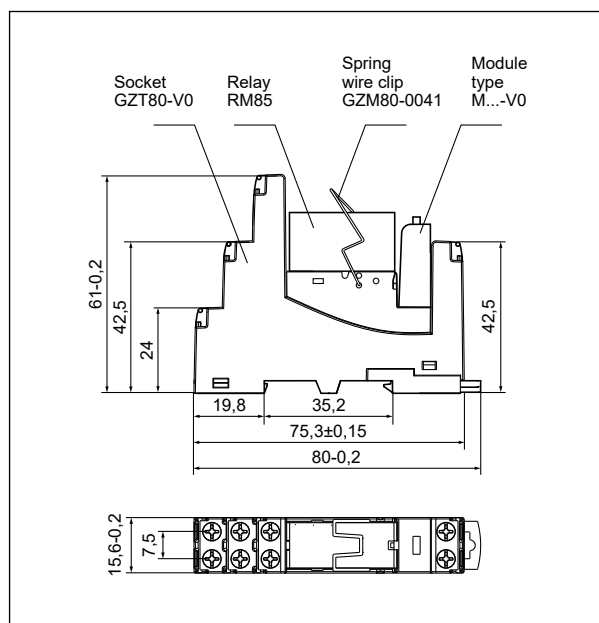

Mounting

Relays **PI85T with socket GZT80-V0** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.

PI85T with socket GZT80-V0

railroad interface relays

Connection diagram (screw terminals side view)

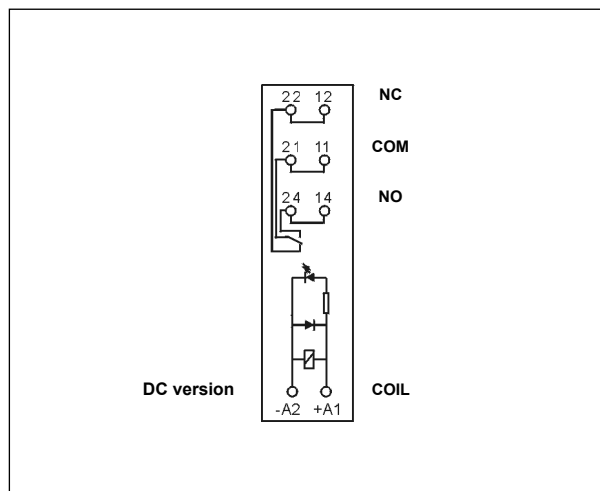

Connection of GZT80-V0 socket

