

TWN4 MULTITECH NANO HF

MINIATURE HF RFID/NFC READER/WRITER FOR EXTERNAL DIRECT MATCHED ANTENNA



Version C0 (SMT)
31 x 17.8 x 2.7 mm

Elatec's TWN4 family of transponder readers and writers allows users to read and write to almost any 13.56 MHz tags and/or labels – it supports all major transponders from various suppliers like EM, Fujitsu, ST, NXP, TI, HID, LEGIC, etc. and ISO standards like ISO14443A/B (T=CL), ISO15693, ISO18092 / ECMA-340 (NFC).

The TWN4 MultiTech Nano HF is designed for integration into machines or other devices. It can be connected to an external antenna through a printed circuit board.

Special features:

- + Compact design (31 x 17.8 x 2.7 mm / 1.22 x 0.7 x 0.12 inch)
- + Components mounted only on one side for easy integration on the main application
- + Edge plated pads for surface mounting (C0) allows easy and reliable PCB mounting, connector option (C1) also available for THT mounting
- + Powerful SDK for writing apps which are executed directly on the reader
- + Firmware update in the field possible
- + Onboard 18 kB flash storage, e.g. for storing user accessible non-volatile data
- + Direct chip-commands support
- + Compliance to EMV contactless protocol specification V2.32)
- + Supports connection of external ISO7816 compatible SAM cards
- + CCID and PC/SC 2.01
- + 8 GPIOs
- + Supports quick (re)configuration over network and over wireless interface with TWN4 CONFIG Card
- + TWN4 Upgrade Card for I option available on request
- + 3D construction data (STEP) available on request



Elevator



EV Chargers



Access



Shop POS



Fitness
Equipment



Ticket POS



PC Log-on



Document
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time
Attendance



Industrial
PC


TECHNICAL DATA

FREQUENCY	13.56 MHz (HF)
ANTENNA	Externally, direct matched for 13.56 MHz
DIMENSIONS (L X W X H)	31 mm x 17.8 mm x 2.7 mm / 1.22 inch x 0.7 inch x 0.12 inch
POWER SUPPLY	3.3 V +/- 5% (direct supply) or 4.3 V - 5.5 V (use of on-board voltage regulator)
CURRENT CONSUMPTION	RF field on: 120 mA typically / Sleep: 500 µA typ. / Cyclic Operation: TBD
TEMPERATURE RANGE	Operating: -25 °C up to +80 °C (-13 °F up to +176 °F) Storage: -45 °C up to +85 °C (-49 °F up to +185 °F)
RELATIVE HUMIDITY	5% to 95% non-condensing
OPERATING MODES (USB)	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01
MTBF	500,000 hours
WEIGHT	Approx. 7 g
SUPPORTED TRANSPONDERS (STANDARD) 13.56 MHZ	<p>ISO14443A: LEGIC Advant¹⁾, MIFARE Classic EV1²⁾, MIFARE Classic, MIFARE Mini, MIFARE DESFire EV1, MIFARE DESFire EV2²⁾, MIFARE DESFire Light³⁾, MIFARE Plus S, X, MIFARE Pro X⁴⁾, MIFARE Smart MX⁴⁾, MIFARE Ultralight, MIFARE Ultralight C, MIFARE Ultralight EV1, NTAG2xx, PayPass⁴⁾, SLE44R35, SLE66Rxx (my-d move)⁴⁾, Topaz</p> <p>ISO14443B: Calypso⁴⁾, Calypso Innovatron protocol⁴⁾, CEPAS⁴⁾, HID iCLASS¹⁾, Moneo⁴⁾, Pico Pass⁵⁾, SRI4K, SRIX4K, SRI512, SRT512</p> <p>ISO18092 ECMA-340: NFC Forum Tag 1-5, NFC Peer-to-Peer, Sony FeliCa⁶⁾, NFC Active and passive communication mode</p> <p>ISO15693: EM4x33⁴⁾, EM4x35⁴⁾, HID iCLASS¹⁾, HID iCLASS SE/SR¹⁾, ICODE SLI, LEGIC Advant¹⁾, M24LR16/64, MB89R118/119, SRF55Vxx (my-d vicinity)⁴⁾, Tag-it, PicoPass⁵⁾</p>
SUPPORTED TRANSPONDERS (OPTION I)	Requires TWN4 SIO Card, All Standard Transponders, HID iCLASS, HID iCLASS SEOS (CSN & Facility Code/PAC) ⁷⁾
OS SUPPORT	Windows XP, Vista, Embedded CE ⁷⁾ , 7 (32-/64-bit), 8, 8.1, 10, Linux, Android ⁷⁾ , iOS ⁷⁾ , MAC OS X ⁷⁾
PERIPHERAL INTERFACES	USB, 2 x serial (logic level 3.3 V, CMOS 5 V tolerant), I ² C, SPI, 8 GPIOs, CAN ⁷⁾ , Clock/Data, Wiegand
TRANSMISSION SPEED	Host: USB Full speed (12 Mbit/s), Serial TTL: up to 115.200 baud, Air: up to 848 kbit/s
CERTIFICATION(S)	REACH and RoHS-III compliant
ORDER CODE(S)	T4NM-FDA0 A0 Standard T4NM-FDA0-I A0 Option I

¹⁾UID only ²⁾r/w enhanced security features on request ³⁾In preparation ⁴⁾r/w in direct chip command mode ⁵⁾UID only, read/write on request ⁶⁾UID + r/w public area

⁷⁾On request

DRAWING

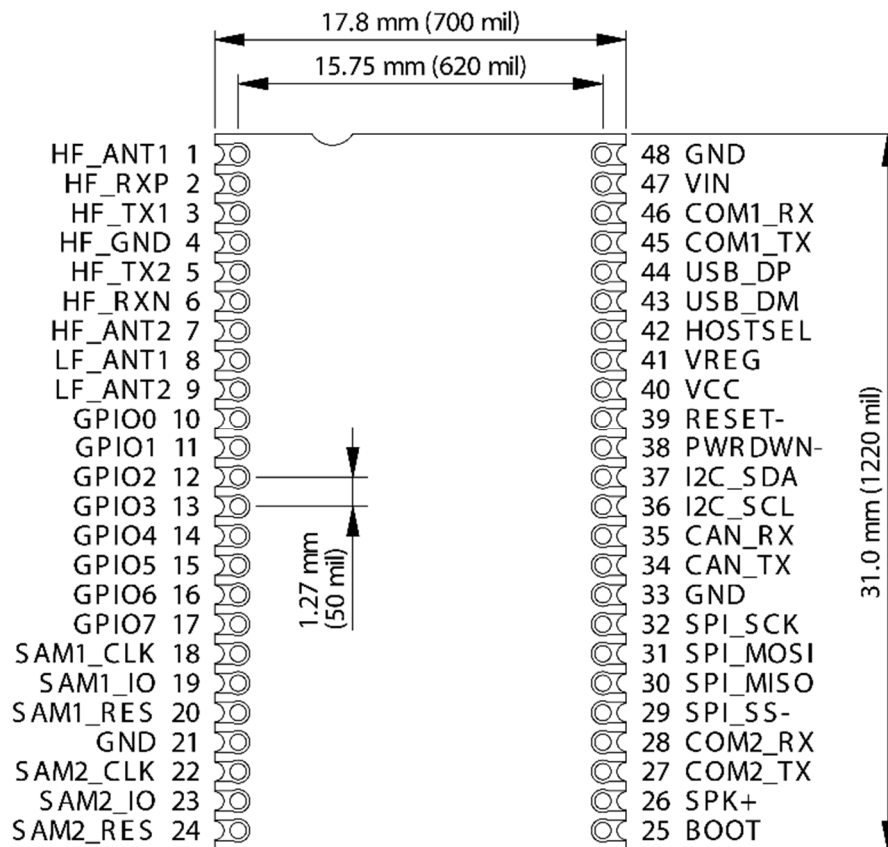

Top view

ELATEC GmbH
 Zeppelinstr. 1
 82178 Puchheim • Germany
 P +49 89 552 9961 0 • F +49 89 552 9961 129
 E-Mail: info-rfid@elatec.com
 Website: elatec.com

ELATEC USA Inc.
 4203 SW High Meadows Ave
 Palm City • FL 34990 • USA
 P +1 772 210 2263 • F +1 772 382 3749
 E-Mail: americas-info@elatec.com
 Website: elatec.com

ELATEC Technology (Shenzhen) LLC
 No. 716 Industrial Bank Tower
 Futian District • Shenzhen • China
 P/F +86 755 2394 6014
 E-Mail: apac-info@elatec.com
 Website: elatec.com

ELATEC reserves the right to change any information or data in this document without prior notice. ELATEC declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.