

## T-COUPLER SLIMLINE M12 MALE / 2X M12 FEMALE


T-coupler (Slimline) M12 - M12



5-pole

Distribution function (NO)

### [Link to Product](#)

#### Illustration

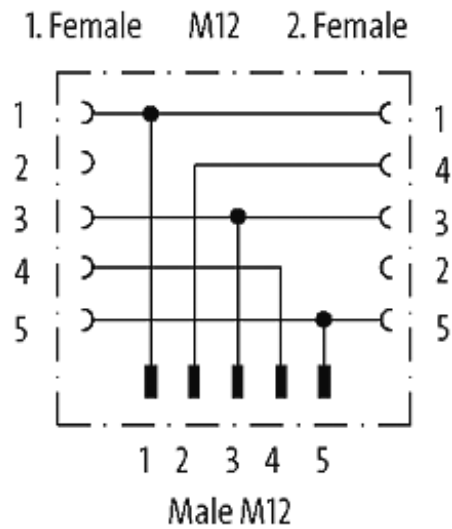

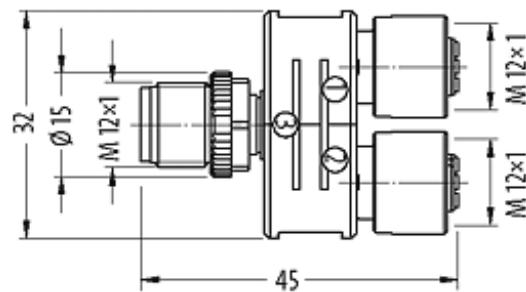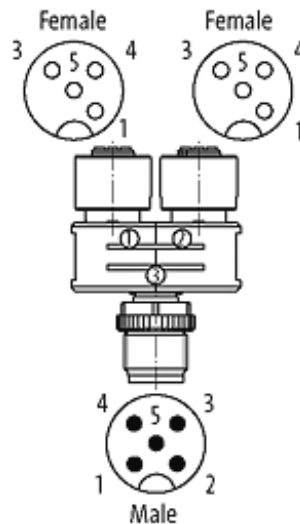

Product may differ from Image

### Approvals



### Form

Form 41131

### General data

Temperature range -25...+85 °C

### Technical Data

Operating voltage max. 60 V AC/DC

Operating current per contact max. 4 A

Locking of ports Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing

Protection IP65 and IP67 when plugged and screwed down (EN 60529)

### Commercial data

country of origin DE

customs tariff number 85369010

minimum order quantity 1