

RCL424024**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Individual relays for TERMSERIES

- Electromechanical relays
- Different contact materials

General ordering data

Version	TERMSERIES, Relay, Number of contacts: 2, CO contact AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 8 A, Plug-in connection
Order No.	4058570000
Type	RCL424024
GTIN (EAN)	4032248189298
Qty.	20 pc(s).

Creation date March 29, 2021 8:29:12 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

RCL424024**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	15.7 mm	Depth (inches)	0.618 inch
Height	29 mm	Height (inches)	1.142 inch
Net weight	12.577 g	Width	12.7 mm
Width (inches)	0.5 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...70 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

Probability of failure

B10	80.000 AC15: 250Vac/2.5A
-----	-----------------------------

Rated data UL

Certificate No. (cURus)	E224238
-------------------------	---------

Control side

Coil resistance	1440 Ω ± 10 %	Power rating	400 mW
Pull-in/drop-out voltage, typ.	16.8 V / 2.4 V DC	Rated control voltage	24 V DC
Rated current DC	16.7 mA		

Load side

AC switching capacity (resistive), max.	2000 VA	Continuous current	8 A
DC switching capacity (resistive), max.	192 W @ 24 V	Inrush current	15 A / 4 s
Max. switching frequency at rated load	0.1 Hz	Max. switching voltage, AC	400 V
Min. switching power	1 mA @ 24 V, 10 mA @ 12 V, 100 mA @ 5 V	Rated switching voltage	250 V AC
Switch-off delay	≤ 6 ms	Switch-on delay	≤ 8 ms

Contact data

Contact type	2 CO contact (AgNi 90/10)	Mechanical service life	30 x 10 ⁶ switching cycles
--------------	------------------------------	-------------------------	---------------------------------------

General data

Test button	No	Mechanical switch position indicator	No
Colour	Transparent	UL 94 flammability rating	V-2

Insulation coordination

Creepage and clearance distance input – output	≥ 10 mm	Dielectric strength of neighbouring contacts	2.5 kV _{eff} / 1 Min.
Dielectric strength of open contact	1 kV _{eff} / 1 min	Dielectric strength, Input/Output	5 kV _{eff} / 1 min
Insulating material group	IIIa	Pollution severity	2
Protection degree	IP20	Rated voltage	250 V
Surge voltage category	III		

Creation date March 29, 2021 8:29:12 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

2

Data sheet

RCL424024

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Further details of approvals / standards

Standards	IEC 61810-1, UL508	Certificate No. (CSA)	249409-2426937
Certificate No. (VDE)	40020589	Certificate No. (cURus)	E224238

Connection data

Wire connection method	Plug-in connection	Pitch in mm (P)	5 mm
------------------------	--------------------	-----------------	------

Classifications

ETIM 6.0	EC001437	ETIM 7.0	EC001437
ECLASS 9.0	27-37-16-01	ECLASS 9.1	27-37-16-01
ECLASS 10.0	27-37-16-01	ECLASS 11.0	27-37-16-01

Approvals

Approvals




ROHS	Conform
UL File Number Search	E224238

Downloads


Engineering Data	STEP
Engineering Data	WSCAD

Wiring diagram

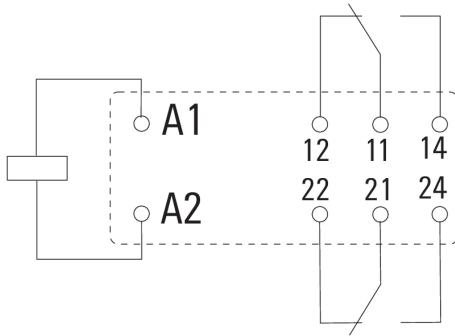


View of Pins from below

Graph

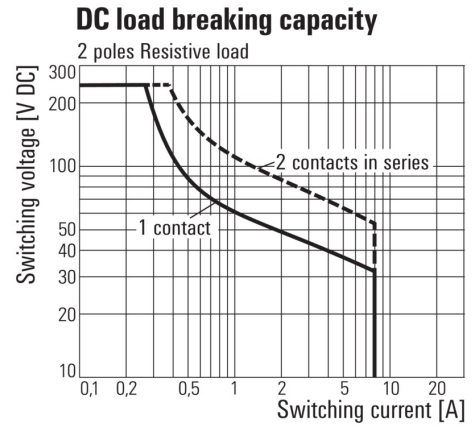


DC load limit curve
 Resistive load

Graph

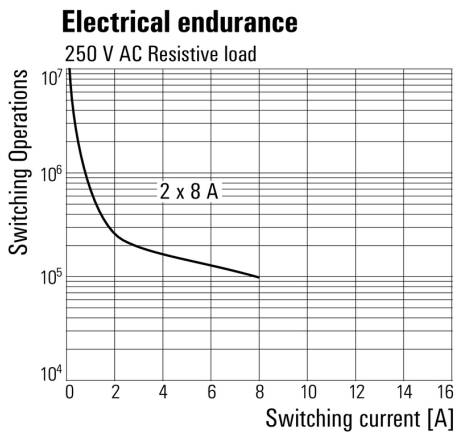

Electrical service life
 250 V AC resistive load

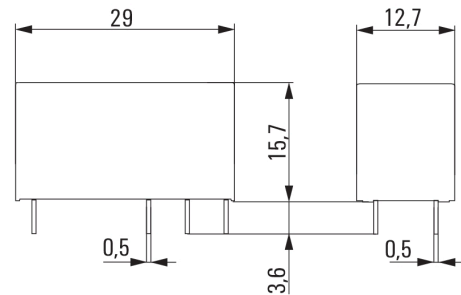


RCL424024

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Miscellaneous

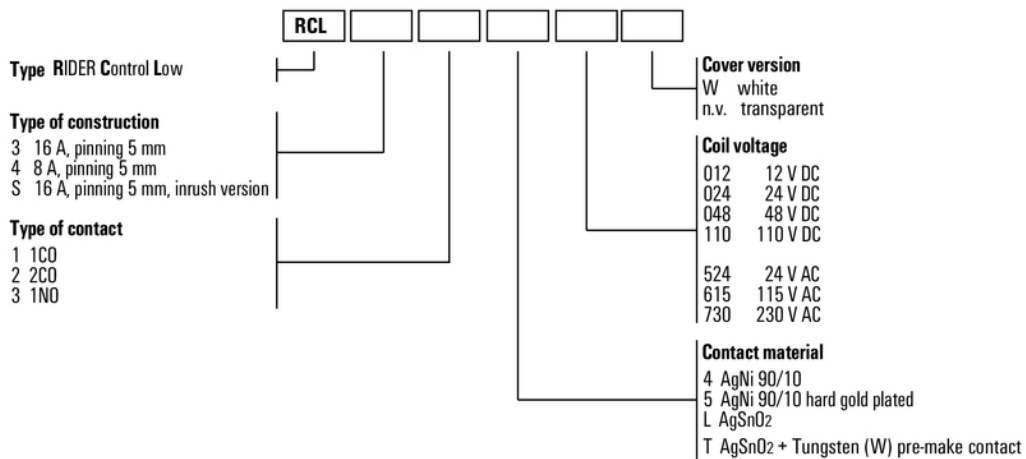

Type codes