


POP® SSD...SSBS

BN 1409 - Blind rivets Standard dome head



Manufacturer

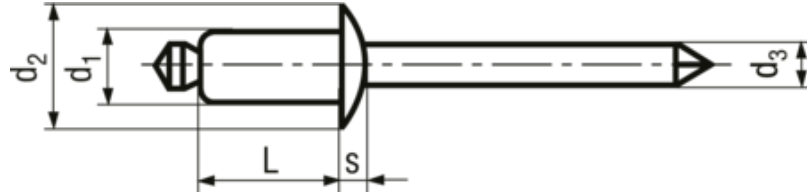

Product description

- Rivet: A2
- Mandrel: stainless steel

Headform

Domed

Brand

POP®

Brandtype

SSD...SSBS

Material

Stainless steel

Material type

A2

Standard

~DIN 7337 A, ~UNI 9200 A, ~ČSN 022391

Article no	p	Code	Rivet sleeve diameter d1	Tolerance	L ±0,5	d2	d3~	Borehole diameter	s max	Shear force N	Tensile force N	Clamping range
3206573	1000	SSD 42 SSBS	3.2	+0,08/-0,1	6.4	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	1,6-3,2
3206574	1000	SSD 43 SSBS	3.2	+0,08/-0,1	8	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	3,2-4,8
3206575	1000	SSD 44 SSBS	3.2	+0,08/-0,1	9.5	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	4,8-6,4
3206576	1000	SSD 46 SSBS	3.2	+0,08/-0,1	12.7	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	7,9-9,5
3206577	1000	SSD 48 SSBS	3.2	+0,08/-0,1	15.9	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	9,5-12,7
3206579	1000	SSD 52 SSBS	4	+0,08/-0,12	7	7,53-8,33	2.41	4,1-4,2	1.2	4000	5000	1,6-3,2
3206580	1000	SSD 54 SSBS	4	+0,08/-0,12	10.2	7,53-8,33	2.41	4,1-4,2	1.2	4000	5000	3,2-6,4
3206581	1000	SSD 56 SSBS	4	+0,08/-0,12	13.3	7,53-8,33	2.41	4,1-4,2	1.2	4000	5000	6,4-9,5
3206582	500	SSD 62 SSBS	4.8	+0,08/-0,15	7.6	9,06-9,98	2.9	4,9-5	1.4	4400	6100	1,6-3,2
3206583	500	SSD 64	4.8	+0,08/-0,15	10.8	9,06-9,98	2.9	4,9-5	1.4	4400	6100	3,2-6,4

Article no	p	Code	Rivet sleeve diameter d1	Tolerance L ±0,5	d2	d3~	Borehole diameter	s max	Shear force N	Tensile force N	Clamping range
3206583	500	SSBS	4.8	+0,08/-0,15 10.8	9,06-9,98	2.9	4,9-5	1.4	4400	6100	3,2-6,4
3206584	500	SSD 66 SSBS	4.8	+0,08/-0,15 14	9,06-9,98	2.9	4,9-5	1.4	4400	6100	6,4-9,5
3206585	500	SSD 68 SSBS	4.8	+0,08/-0,15 17.2	9,06-9,98	2.9	4,9-5	1.4	4400	6100	9,5-12,7
1169327	100	SSD 42 SSBS	3.2	+0,08/-0,1 6.4	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	1,6-3,2
1169335	100	SSD 43 SSBS	3.2	+0,08/-0,1 8	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	3,2-4,8
1169343	100	SSD 44 SSBS	3.2	+0,08/-0,1 9.5	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	4,8-6,4
1127691	100	SSD 46 SSBS	3.2	+0,08/-0,1 12.7	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	7,9-9,5
1671812	100	SSD 48 SSBS	3.2	+0,08/-0,1 15.9	6,04-6,65	1.93	3,3-3,4	1.1	2400	3000	9,5-12,7
1169351	100	SSD 52 SSBS	4	+0,08/-0,12 7	7,53-8,33	2.41	4,1-4,2	1.2	4000	5000	1,6-3,2
1169378	100	SSD 54 SSBS	4	+0,08/-0,12 10.2	7,53-8,33	2.41	4,1-4,2	1.2	4000	5000	3,2-6,4
1169386	100	SSD 56 SSBS	4	+0,08/-0,12 13.3	7,53-8,33	2.41	4,1-4,2	1.2	4000	5000	6,4-9,5
1169394	100	SSD 62 SSBS	4.8	+0,08/-0,15 7.6	9,06-9,98	2.9	4,9-5	1.4	4400	6100	1,6-3,2
1169408	100	SSD 64 SSBS	4.8	+0,08/-0,15 10.8	9,06-9,98	2.9	4,9-5	1.4	4400	6100	3,2-6,4
1169416	100	SSD 66 SSBS	4.8	+0,08/-0,15 14	9,06-9,98	2.9	4,9-5	1.4	4400	6100	6,4-9,5
1169424	100	SSD 68 SSBS	4.8	+0,08/-0,15 17.2	9,06-9,98	2.9	4,9-5	1.4	4400	6100	9,5-12,7