


# IP57 INSULATED BULLETS & RECEPTACLES • BUTTS

Crimp makes IP57. No heat required.

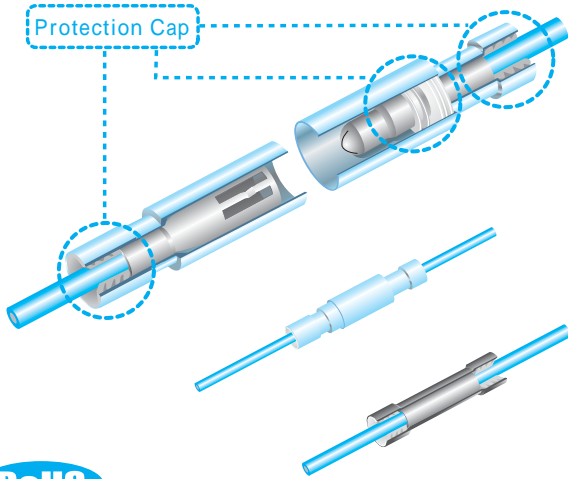

## SPECIFICATION

RATED VOLTAGE 300V

RATED CURRENT

WIRE SIZE	PC	TMNB
1.25mm <sup>2</sup>	15A	19A
2mm <sup>2</sup>	20A	27A

FLAME RETARDANCE UL94V-2




TEMPERATURE RANGE - 40 ~ + 105

PROTECTION IP57(IEC529)

B





## IP57 INSULATED BULLETS/RECEPTACLES

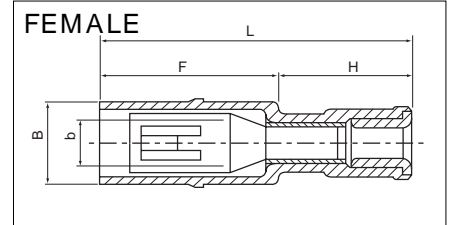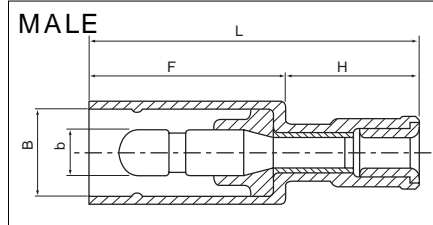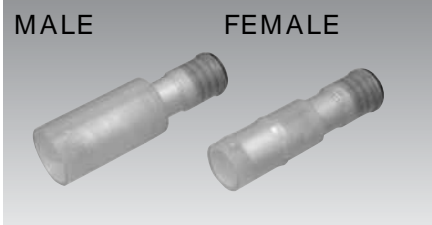

PART NUMBER	DIMENSIONS mm					WIRE RANGE			TOOL No.	INS	COLOR	STD QTY/BOX
	b	B	L	F	H	STRANDED mm <sup>2</sup>	AWG	WIRE OUTSIDE DIAMETER				
PC 4009-M-WP	4.0	5.1	27.7	16.5	11.2	0.75	18-16	2.6	NH 64	Nylon	RED TRANSLUCENT	1,000 (100 × 10)
PC 4009-F-WP	3.95	6.9	26.2	15.0		1.25		3.2				
PC 4020-M-WP	4.0	7.4	27.7	16.5		2.0	14	3.0				
PC 4020-F-WP	3.95	6.9	26.2	15.0				3.6				

## IP57 INSULATED BUTT CONNECTORS

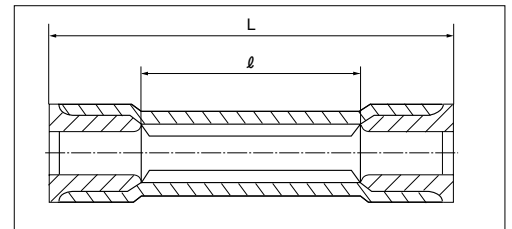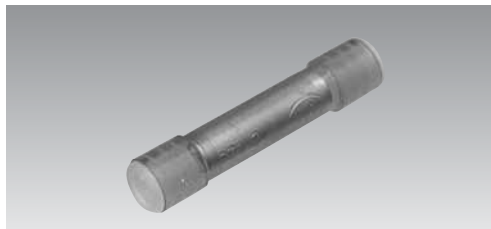

PART NUMBER	DIMENSIONS mm		WIRE RANGE			TOOL No.	INS	COLOR	STD QTY/BOX
	L	l	STRANDED mm <sup>2</sup>	AWG	WIRE OUTSIDE DIAMETER				
TMN B-1.25-WP	26.9	15.0	0.5 ~ 1.25	20-16	2.5 ~ 2.9	NH 64	Nylon	RED TRANSLUCENT BLUE TRANSLUCENT	1,000 (100 × 10)
TMN B-2-WP			1.04 ~ 2.63	16-14	3.0 ~ 3.6				