
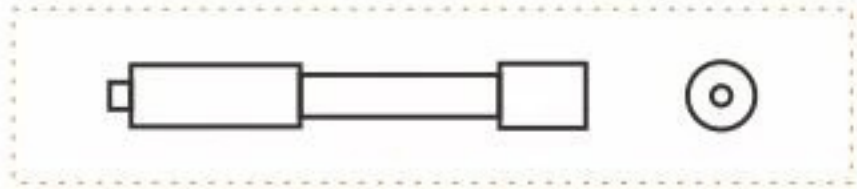


产品外形尺寸 Product Dimension

型号 Model	尺码 Size	安装方式 Installation	额定电压(V) Rated voltage(V)	额定电流(A) Rated current(A)	尺寸Dimension(mm)							证书 Certification
					A	B	C	D	G	H	J	
FRG	18	LB64	DC700V IEC DC750V UL	20~125	2	18.2	19	76	62	6.5	9	CE ROHS
	21	LB70		60~160	2.5	21.3	22	90	70	9	11	
	24	LB77		125~200	3	23	25.5	98	77	9	14	
	27	LB70		90~225	3	26.8	28	90	70	9	11	
	36	LB81		150~355	3	33	36	106	81	11	19	
	38	LB85		180~350	3	38	44	113	85	11	16	
	48	LB85		315~600	3.5	47.5	51	109	85	11	19	

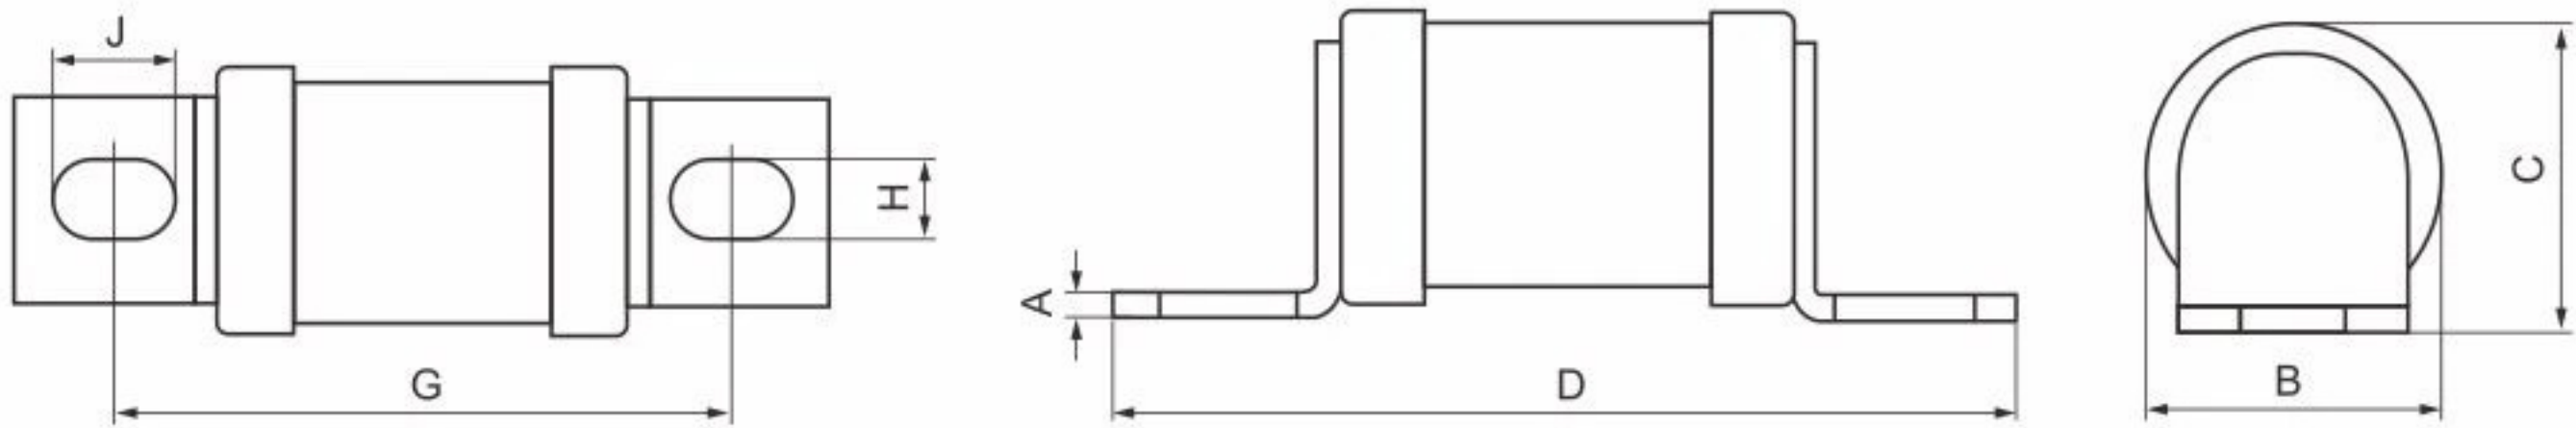

注:如有要求带信号(远程控制)请注明,并向销售部或技术部取得联系
Note: If you require signal (remote control), please specify and contact the Sales Department or Technical Department.

产品技术参数 Technical parameters

型号 Model	尺码 Size	安装方式 Installation	电压(V) Rated voltage(V)	电流(A) Rated current(A)	I²t(A²S)		功耗(W) Power consumption
					弧前Before the arc	熔断fusing	
FRG	18	LB64	IEC/UL DC700V DC750V	25	25	150	7
				32	32	190	10
				35	52	310	11
				40	100	600	12
				45	105	680	13
				50	120	780	14
				56	135	950	15
				63	170	1200	16
				80	360	2500	18
				100	500	3500	21
				125	650	4500	25
FRG	21	LB70		60	200	800	16
				80	250	900	18
				100	360	1300	21
				125	540	1900	27
				140	850	2500	35
				160	1000	3700	39
				125	540	1900	27
FRG	24	LB77		140	850	2500	35
				160	1000	3700	39
				180	1400	5300	46
				200	1900	7100	52
				90	250	900	19
FRG	27	LB70		100	360	1300	21
				125	540	1900	27
				140	850	2500	36
				160	1000	3700	40
				180	1400	5300	46
				200	1900	7100	52
				225	3700	10500	55
				150	2100	14000	35
FRG	36	LB81		160	2400	15000	36
				180	3800	25000	38
				200	6000	40000	40
				225	8500	60000	44
				250	11500	80000	46
				280	16500	100000	48
				315	19000	125000	53
				355	22000	160000	55
				180	3800	25000	38
				200	6000	40000	40
FRG	38	LB85		225	8500	60000	44
				250	11500	80000	46
				280	16500	100000	48
				315	19000	125000	53
				355	22000	160000	55
				315	8600	62000	51
				350	13500	97000	54
FRG	48	LB85		400	21000	150000	60