



1 2 3 4 5 6 7

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

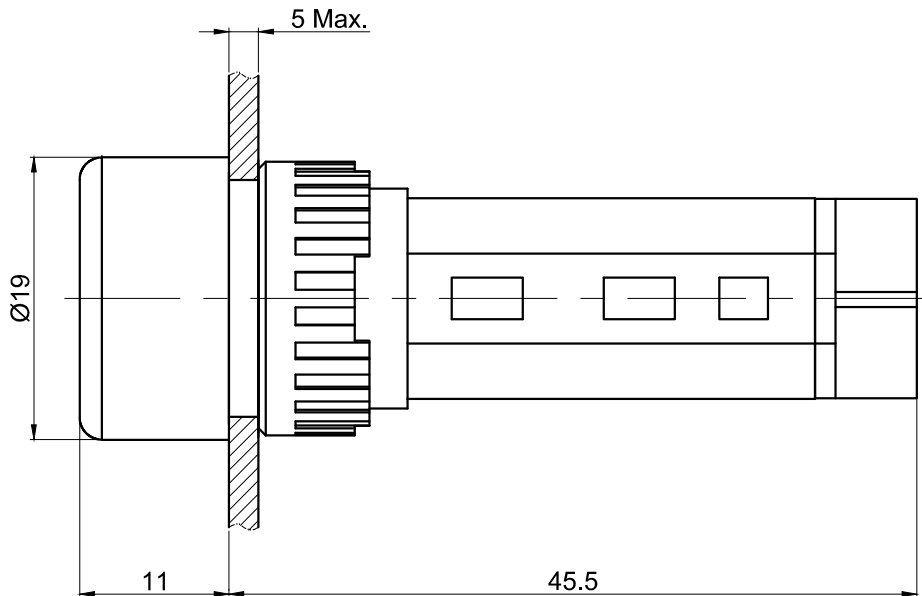

PANEL CUTOUT  
MAX.PANEL THICKNESS  
5 mm

Part Number:AD16-16■/▲

■	Design Code
M	Buzzer
JM	Intermittent buzzer
S	Filcker
SM	Filcker buzzer

▲	Lamp Voltage
12V	DC 12V
24V	DC 24V
36V	DC 36V
48V	DC 48V
220V	AC 220V
380V	AC 380V
Other voltage can be made to order	

**SPECIFICATIONS:**

- 1.Electrical Life: ≥40,000 hours.
- 2.Permitted Voltage ±20%(≥110V).
- 3.Dielectric Strength: 2.5KV(AC RMS),1min.
- 4.Usage Frequency(AC): 50~60 Hz.
- 5.Rated Operating Current: ≤20mA.
- 6.Brightness: ≥100cd/m².
- 7.Comparative Tracking Index CT1≥100,flame retardant.
- 8.Insulation Resistance: Ui≤60V,5MΩ,60V<Ui≤660V,50MΩ.
- 9.IP Class: IP40.
- 10.Sound intensity: ≥80db (10cm) .

**MATERIALS:**

- 1.Head: PC.
- 2.Body: PC.
- 3.Base: PA.

BRAND 品牌 <b>ONPOW</b>	<b>红波按钮制造有限公司</b> ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
	USED 用途	APPD 审核	CH 2020/05/05	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	FINISH 处理	CHKD 校对	NCH 2020/05/05	
	SCALE 比例	UNIT 单位	DR. 制图	ZPD 2020/05/05
	DIMENSIONS	TOLERANCE	TITLE 名称	
0.00 TO 18.00mm	±0.43mm	AD16-16 Buzzer		
18.01 TO 30.00mm	±0.52mm	DWG NO. 图号		
30.01 TO 50.00mm	±0.62mm	AD16-16蜂鸣器		
50.01 TO 80.00mm	±0.74mm	FILE NAME 档案名称		
		SHEET 张	1 / 1	REV. 更改
				1

1 2 3 4 5 6 7