


U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>SKINTOP® ST-M</b>	29.11.2013

High oil-resistance for maximum reliability  
 Permanent vibration protection  
 Wide, variable clamping ranges  
 Optimum strain relief  
 Various accessories (e.g. multiple sealing inserts)



Good chemical resistance



Wide clamping range



Maximum vibration protection



Assembly time



Optimum strain relief



Temperature-resistant



Variety of approval certifications

### Info

Now with IP 69 K approval! Proven to withstand the most demanding cleaning procedures for industrial machinery with high-pressure cleaners and hot water!

### Application range

Used in areas where cables and wires need to be safely inserted into housings  
 Machine and equipment manufacturing  
 Photovoltaic  
 Automation technology  
 Offshore platforms, equipment and shipyards

### Design

Metric connection thread acc. to EN 50262

### Norm references / Approvals

UL File Nr. E79903

Product Management	Document: LAPP_PRO976EN.pdf	1 / 5
--------------------	-----------------------------	-------

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>SKINTOP® ST-M</b>	<b>29.11.2013</b>

**Note**

Refer to SKINTOP® metric accessories for suitable accessories  
Counter nut to be used: SKINTOP® GMP-GL-M  
SKINTOP® ST M ISO types have an extra-long connection thread  
SKINTOP® ST M ISO versions with extra-long connection thread, see table, no DNV approval

**Remark**

Photographs are not to scale and do not represent detailed images of the respective products.

**Technical Data**


Caution:	Refer to Appendix T21 for the installation dimensions and torques
Colour delivered:	Silver grey (RAL 7001) Light grey (RAL 7035) Black (RAL 9005), UV-resistant
Material:	Body: Polyamide Seal: CR
Tests:	GGVS: TÜ.EGG.020-95
Protection rating:	IP 68 - 5 bar IP 69 K
Temperature range:	Fixed: -40°C to +100°C Dynamic: -20°C to +100°C


Product Management	Document: LAPP_PRO976EN.pdf	2 / 5
--------------------	-----------------------------	-------

Part number	Article designation / size	Clamping range ØF (mm)	SW (mm)	Overall length/ C (mm)	Thread length/ D (mm)
SKINTOP® ST-M silver grey					
53111000	ST-M 12 x 1,5	3,5-7	15	30.0	8.0
53111010	ST-M 16 x 1,5	4,5-10	19	34.0	8.0
53111020	ST-M 20 x 1,5	7-13	25	37.0	9.0
53111030	ST-M 25 x 1,5	9-17	30	40.0	10.0
53111040	ST-M 32 x 1,5	11-21	36	47.0	10.0
53111050	ST-M 40 x 1,5	19-28	46	52.0	10.0
53111060	ST-M 50 x 1,5	27-35	55	62.0	12.0
53111070	ST-M 63 x 1,5	34-45	66	71.0	12.0
SKINTOP® ST-M black					
53111200	ST-M 12 x 1,5	3,5-7	15	30.0	8.0
53111210	ST-M 16 x 1,5	4,5-10	19	34.0	8.0
53111220	ST-M 20 x 1,5	7-13	25	37.0	9.0
53111230	ST-M 25 x 1,5	9-17	30	40.0	10.0
53111240	ST-M 32 x 1,5	11-21	36	47.0	10.0
53111250	ST-M 40 x 1,5	19-28	46	52.0	10.0
53111260	ST-M 50 x 1,5	27-35	55	62.0	12.0
53111270	ST-M 63 x 1,5	34-45	66	71.0	12.0
SKINTOP® ST-M light grey					
53111400	ST-M 12 x 1,5	3,5-7	15	30.0	8.0
53111410	ST-M 16 x 1,5	4,5-10	19	34.0	8.0
53111420	ST-M 20 x 1,5	7-13	25	37.0	9.0
53111430	ST-M 25 x 1,5	9-17	30	40.0	10.0
53111440	ST-M 32 x 1,5	11-21	36	47.0	10.0
53111450	ST-M 40 x 1,5	19-28	46	52.0	10.0
53111460	ST-M 50 x 1,5	27-35	55	62.0	12.0
53111470	ST-M 63 x 1,5	34-45	66	71.0	12.0
SKINTOP® ST M ISO silver-grey (with long metric connecting thread)					
53017010	ST M 16 x 1,5	3,5-8	19	40.0	12.0
53017030	ST M 20 x 1,5	5-12	24	45.0	13.0
53017040	ST M 25 x 1,5	9-14	27	47.0	13.0



Part number	Article designation / size	Clamping range ØF (mm)	SW (mm)	Overall length/ C (mm)	Thread length/ D (mm)
SKINTOP® ST M ISO black (with long metric connecting thread)					
53010000	ST-M 12 x 1,5	3,5-7	15	36,7	15.0
53017210	ST M 16 x 1,5	3,5-8	19	40.0	12.0
53017230	ST M 20 x 1,5	5-12	24	45.0	13.0
53017240	ST M 25 x 1,5	9-14	27	47.0	13.0

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>SKINTOP® ST-M</b>	29.11.2013

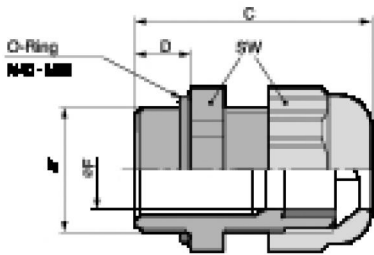

Product Management	Document: LAPP_PRO976EN.pdf	5 / 5
--------------------	-----------------------------	-------