

PRODUCT DATA



LS-L120-12W-XXXXX(24V)

LED Type 2835 Luminous efficacy 130 lm/W Typical luminous flux, lm 1560 lm/m Wattage 12 W/m Ingress protection IP 20

3000/4000/6500 K Colometric data, CCT

Color rendering index 84 CRI

LED strip Dimensions, mm 5000 x 8 x 2 mm Operating temperature -20°C ~ +40°C

L80 lifetime L80B10 > 36000 hours (@Ta 25 °C)

Warranty 2 years limited LS-L120-12W 2




APPLICATIONS

Signage Accent lighting

Order code



CUT ONLY WHERE IT IS SPECIFIED

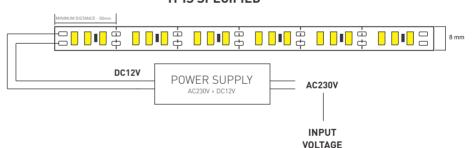

SHIPPING INFORMATION

Single bag quantity Carton box quantity 5m

500m



This product is only suitable for connection to dedicated Class 1 or Class 2 power supplies rated DC24V (± 5%)

- This product is not to draw a total wattage of greater than the secondary (output) rating of the power supply
- This product is suitable for use in dry locations
- Specifications of the products might change without further notice. Make sure to use the most recent