

PI84T with socket GZT80-V0

railroad interface relays

RM84 + GZT80-V0



NEW

- 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw
- Compliance with standards: EN 45545-2 (category EL10, requirement R26 - flammability class V-0 as per EN 60695-11-10); EN 61373:2011 category 1, class B (mechanical shock and vibration resistance); EN 50155:2007; EN 60077-1; EN 61810-1
- Recognitions, certifications, directives: recognitions RM84, RoHS,

CE ENE CTR

Contact data

Number and type of contacts		2 CO
Contact material		AgSnO₂
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		10 V
Rated load (capacity)	AC1	8 A / 250 V AC
	AC15	3 A / 120 V
	DC1	1,5 A / 240 V (B300)
	DC13	8 A / 24 V DC (see Fig. 3)
		0,22 A / 120 V
		0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/3 HP
	AC3 acc. to IEC 60947-4-1	240 V AC, 3,6 FLA, single-phase motor ❶
		0,37 kW
		240 V AC, single-phase motor
Min. switching current		10 mA
Max. inrush current		15 A
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		1 W
Contact resistance		≤ 100 mΩ
		1 A, 24 V
Max. operating frequency		
• at rated load	AC1	600 cycles/hour
• no load		72 000 cycles/hour

Coil data

Rated voltage	DC	24, 110 V ❷
Must release voltage		≥ 0,1 U _n
Operating range of supply voltage		0,7...1,25 U _n EN 50155:2007
		see Table 1
Must operate voltage		≤ 0,7 U _n
Rated power consumption	DC	0,4 ... 0,48 W

Insulation according to EN 60664-1

Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V
		1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Flammability class		V-0 UL 94, EN 60695-11-10
Dielectric strength		
• between coil and contacts		5 000 V AC
• contact clearance		1 000 V AC
• pole - pole		2 500 V AC
		type of insulation: reinforced
		type of clearance: micro-disconnection
		type of insulation: basic
Contact - coil distance		
• clearance		≥ 10 mm
• creepage		≥ 10 mm


General data

Operating / release time (typical values)		7 ms / 3 ms
Electrical life		
• resistive AC1		> 10 ⁵
• cosφ		8 A, 250 V AC
• DC L/R=40 ms		see Fig. 2
		> 10 ⁵
		0,12 A, 220 V DC
Mechanical life (cycles)		> 3 x 10 ⁷
Dimensions (L x W x H)		80 x 15,6 x 61 mm
Weight		61 g
Ambient temperature	• storage	-40...+85 °C
(non-condensation and/or icing)	• operating	-40...+55 °C
Cover protection category		IP 20
		EN 60529
Environmental protection		RM84: RTII
		GZT80-V0: RT0
		EN 61810-7
Shock / vibration resistance		category 1, class B EN 61373:2011
		(set: relay in socket with clip and module)

The data in bold type relate to the standard versions of the relays. ❶ For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC. ❷ For other voltages contact Relpol S.A., please.


Electrical life at AC resistive load.
Switching frequency: 600 cycles/hour

Fig. 1

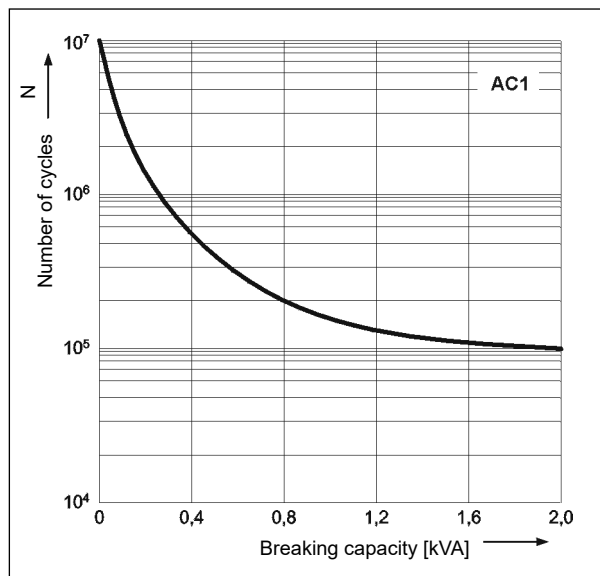


Electrical life reduction factor at AC inductive load

Fig. 2

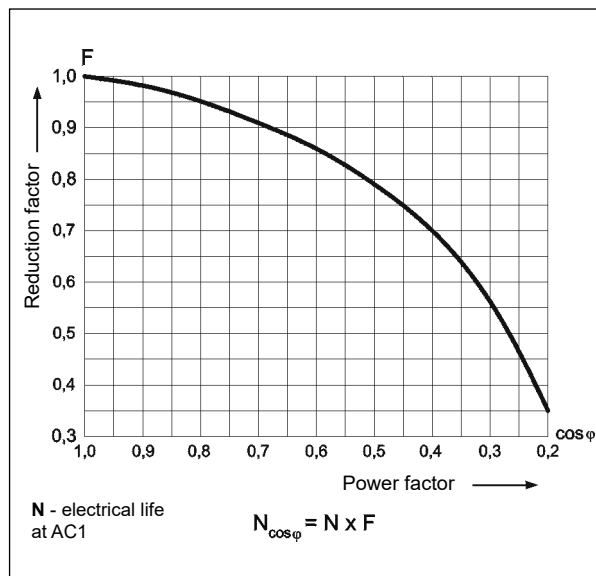


Max. DC resistive load breaking capacity

Fig. 3

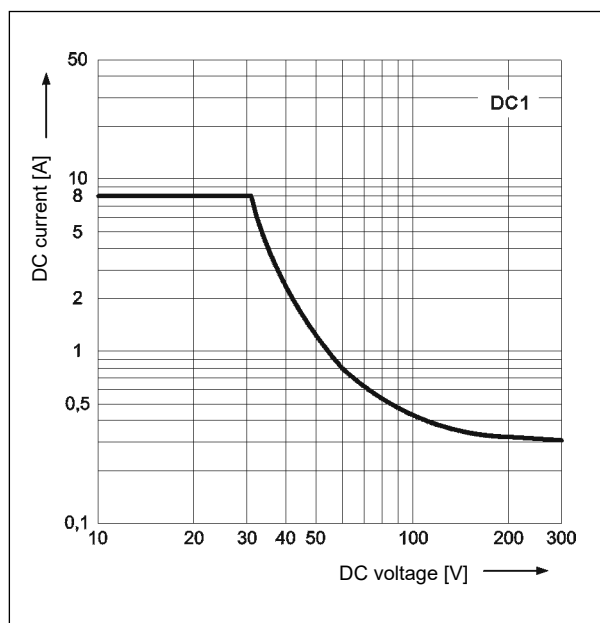

Dimensions

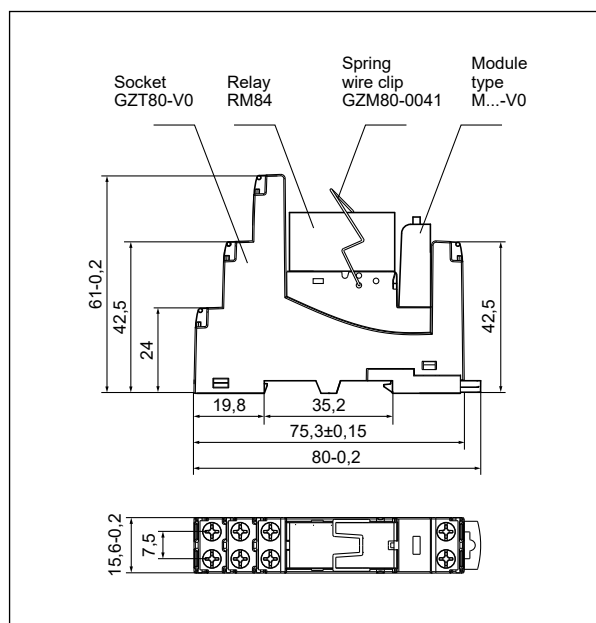

Mounting

Relays **PI84T with socket GZT80-V0** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with one M3 screw. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.


PI84T with socket GZT80-V0

railroad interface relays

Connection diagram (screw terminals side view)

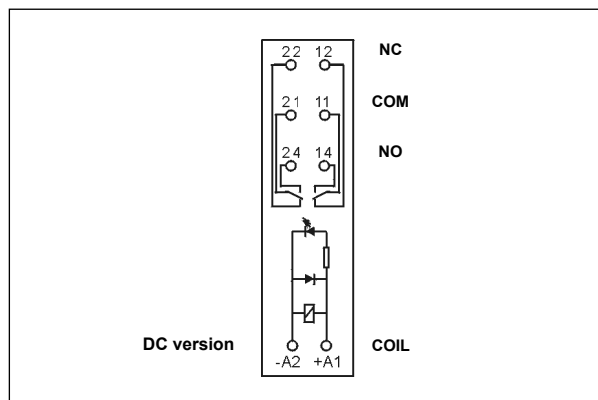

Connection of GZT80-V0 socket

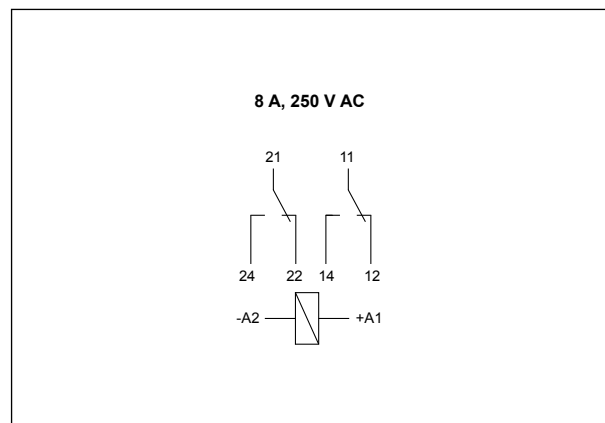


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC ②	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC according to EN 50155:2007 ③	
				min.	max.
024DC	24	1 440	± 10%	16,8	30,0
110DC	110	25 200	± 10%	77,0	137,5

The data in bold type relate to the standard versions of the relays. ② For other voltages contact Relpol S.A., please. ③ Changes of voltage within the range 0,6...1,4 Un below 0,1 s and changes of voltage within the range 1,25...1,4 Un below 1 s are admissible and they do not distort operation of the relays.

Ordering codes

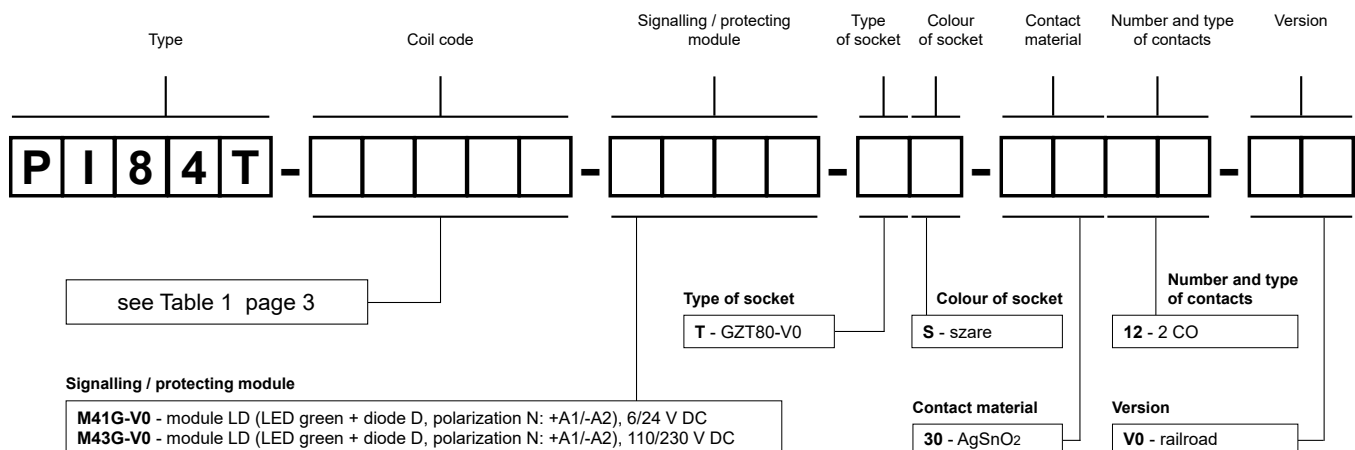

Examples of ordering codes:

PI84T-024DC-M41G-TS-3012-V0

interface relay **PI84T** (railroad version) consists of: relay **RM84** (two changeover contacts, contact material AgSnO₂, coil voltage 24 V DC), socket **GZT80-V0** (grey, screw terminals), signalling / protecting module **M41G-V0** (version LD), spring wire clip **GZM80-0041**

PI84T-110DC-M43G-TS-3012-V0

interface relay **PI84T** (railroad version) consists of: relay **RM84** (two changeover contacts, contact material AgSnO₂, coil voltage 110 V DC), socket **GZT80-V0** (grey, screw terminals), signalling / protecting module **M43G-V0** (version LD), spring wire clip **GZM80-0041**