



### ■ Features

- Plastic housing with class II design
- Built-in active PFC function
- Standby power consumption <0.5W
- IP67 rating for indoor or outdoor installations
- Function options: 3 in 1 dimming (dim-to-off); Auxiliary DC output
- Typical lifetime >50000hours
- 5 years warranty


### ■ Applications

- LED panel lighting
- LED downlight
- LED decorative lighting
- Moving sign
- Type “HL” for use in Class I, Division 2 hazardous (Classified) location

### ■ Description

NPF-120D series is a 120W AC/DC LED driver featuring the constant current mode output. NPF-120D operates from 90~305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40°C~+90°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-120D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

### ■ Model Encoding

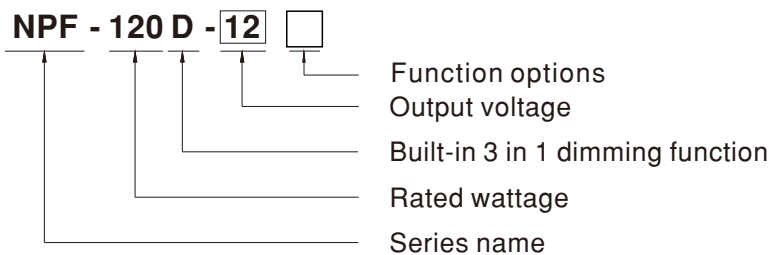


| Type  | IP Level | Function   | Note     |
|-------|----------|--|----------|
| Blank | IP67     | 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance) | In Stock |
| BE    | IP67     | 3 in 1 dimming function and Auxiliary DC output                  | In Stock |

**SPECIFICATION**

| MODEL                     |  | NPF-120D-12 <input type="checkbox"/>  | NPF-120D-15 <input type="checkbox"/> | NPF-120D-20 <input type="checkbox"/> | NPF-120D-24 <input type="checkbox"/> | NPF-120D-30 <input type="checkbox"/> | NPF-120D-36 <input type="checkbox"/> | NPF-120D-42 <input type="checkbox"/> | NPF-120D-48 <input type="checkbox"/> | NPF-120D-54 <input type="checkbox"/> |     |
|---------------------------|--|---|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|-----|
| OUTPUT                    | RATED CURRENT                                | 10A   | 8A                                   | 6A                                   | 5A                                   | 4A                                   | 3.4A                                 | 2.9A                                 | 2.5A                                 | 2.3A                                 |     |
|                           | RATED POWER                                  | 120W  | 120W                                 | 120W                                 | 120W                                 | 120W                                 | 122.4W                               | 121.8W                               | 120W                                 | 124.2W                               |     |
|                           | CONSTANT CURRENT REGION                      | 7.2 ~ 12V   | 9 ~ 15V                              | 12 ~ 20V                             | 14.4 ~ 24V                           | 18 ~ 30V                             | 21.6 ~ 36V                           | 25.2 ~ 42V                           | 28.8 ~ 48V                           | 32.4 ~ 54V                           |     |
|                           | CURRENT RIPPLE                               | 5.0% max. @rated current  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | CURRENT TOLERANCE                            | ±5.0%   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | AUXILIARY DC OUTPUT<br><small>Note.4</small> | Nominal 12V(deviation 11.4~12.6V)@0.2A for BE-Type only   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | SET UP TIME<br><small>Note.3</small>         | 500ms/115VAC, 230VAC  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
| INPUT                     | VOLTAGE RANGE<br><small>Note.2</small>       | 90 ~ 305VAC      127 ~ 431VDC<br>(Please refer to "STATIC CHARACTERISTIC" section)  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | FREQUENCY RANGE                              | 47 ~ 63Hz   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | POWER FACTOR (Typ.)                          | PF ≥ 0.97/115VAC, PF ≥ 0.96/230VAC, PF ≥ 0.94/277VAC@full load<br>(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | TOTAL HARMONIC DISTORTION                    | THD < 20% (@load ≥ 60%/115VAC, 230VAC; @load ≥ 75%/277VAC)<br>(Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | EFFICIENCY (Typ.)                            | BLANK-TYPE  | 87.5%                                | 88%                                  | 89%                                  | 89.5%                                | 89%                                  | 89.5%                                | 89.5%                                | 90%                                  | 90% |
|                           |  | BE-TYPE <small>(Note.5)</small>   | 87.5%                                | 87.5%                                | 88.5%                                | 89%                                  | 88.5%                                | 89%                                  | 89%                                  | 89%                                  | 89% |
|                           | AC CURRENT (Typ.)                            | 1.3A / 115VAC      0.65A / 230VAC      0.55A / 277VAC   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | INRUSH CURRENT(Typ.)                         | COLD START60A(twidth=520μs measured at 50% Ipeak) at 230VAC; Per NEMA 410   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | MAX. NO. of PSUs on 16A CIRCUIT BREAKER      | 4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | LEAKAGE CURRENT                              | <0.25mA / 277VAC  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
| STANDBY POWER CONSUMPTION | <0.5W  |   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
| PROTECTION                | OVER CURRENT                                 | 95 ~ 108%<br>Constant current limiting, recovers automatically after fault condition is removed   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | SHORT CIRCUIT                                | Hiccup mode, recovers automatically after fault condition is removed  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | OVER VOLTAGE                                 | 15 ~ 17V  | 17.5 ~ 21V                           | 23 ~ 27V                             | 28 ~ 34V                             | 34 ~ 40V                             | 41 ~ 46V                             | 46 ~ 54V                             | 54 ~ 60V                             | 59 ~ 66V                             |     |
|                           | OVER TEMPERATURE                             | Shut down o/p voltage, re-power on to recover   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
| ENVIRONMENT               | WORKING TEMP.                                | Tcase=-40 ~ +90°C (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | MAX. CASE TEMP.                              | Tcase=+90°C   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | WORKING HUMIDITY                             | 20 ~ 95% RH non-condensing  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | STORAGE TEMP., HUMIDITY                      | -40 ~ +80°C, 10 ~ 95% RH  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | TEMP. COEFFICIENT                            | ±0.03%/°C (0 ~ 40°C)  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
| SAFETY & EMC              | SAFETY STANDARDS                             | UL8750(type"HL"), CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13, EN62384 independent,EAC TP TC 004, GB19510.1,GB19510.14,IP67 approved; Design refer to EN60335-1 |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | WITHSTAND VOLTAGE                            | I/P-O/P:3.75KVAC  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | ISOLATION RESISTANCE                         | I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | EMC EMISSION                                 | Compliance to EN55015, EN61000-3-2 Class C (@ load ≥ 60%) ; EN61000-3-3;GB17743 and GB17625.1, EAC TP TC 020  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | EMC IMMUNITY                                 | Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level(surge immunity Line-Line 2KV);EAC TP TC 020   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
| OTHERS                    | MTBF   | 877.8K hrs min. Telcordia SR-332 (Bellcore) ; 233.9K hrs min. MIL-HDBK-217F (25°C)  |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | DIMENSION                                    | 191*63*37.5mm (L*W*H)   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |
|                           | PACKING                                      | 0.97Kg; 15pcs/15.6Kg/0.87CUFT   |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |     |


- NOTE**
- All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.
  - De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
  - Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
  - The Auxiliary DC output is defined between AUX+ and DIM-.
  - The efficiency for BE-Type is measured when the Auxiliary DC output is 100% loaded at 12V, 0.2A.
  - The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
  - This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is about 75°C or less.
  - Please refer to the warranty statement on MEAN WELL's website at <http://www.meanwell.com>
  - The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
  - For any application note and IP water proof function installation caution, please refer our user manual before using.  
[https://www.meanwell.com/Upload/PDF/LED\\_EN.pdf](https://www.meanwell.com/Upload/PDF/LED_EN.pdf)

**■ BLOCK DIAGRAM**

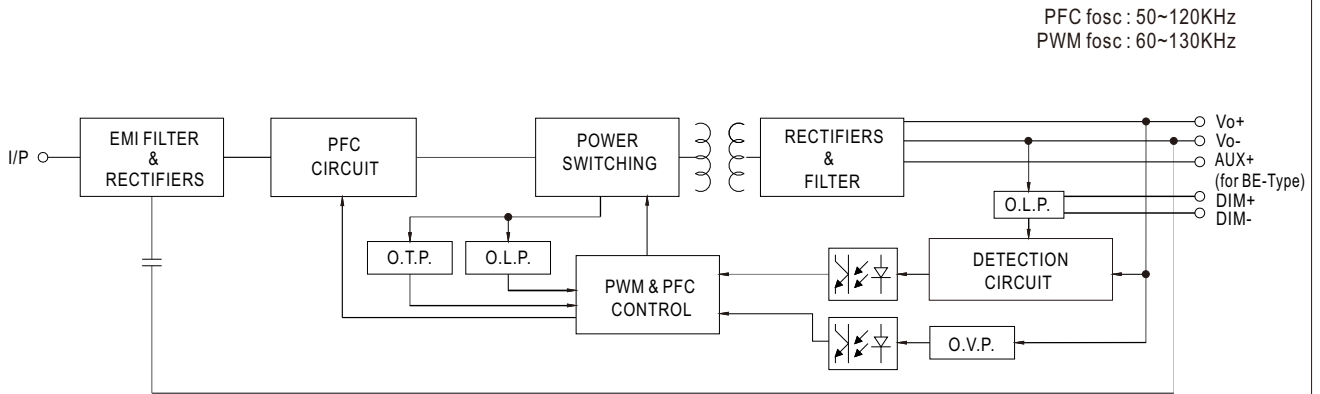

**■ DRIVING METHODS OF LED MODULE**

※ This series works in constant current mode to directly drive the LEDs.

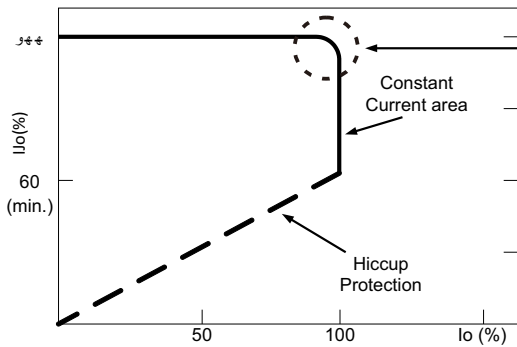


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.


**■ DIMMING OPERATION**

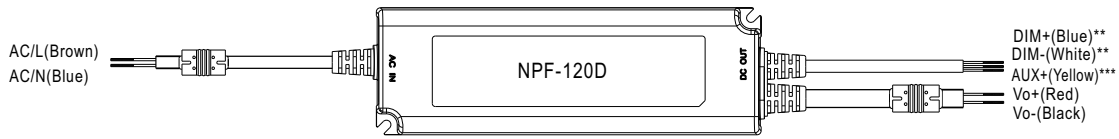


\*\* For wire diameters, please refer to Mechanical Specification

※ **3 in 1 dimming function**


- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100μA (typ.)
- ◎ Applying additive 0 ~ 10VDC

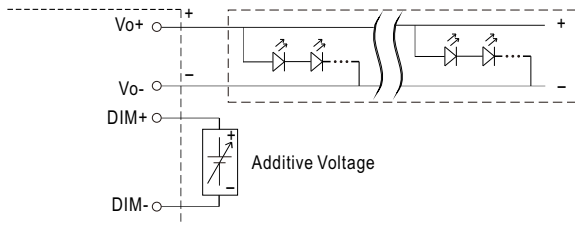


"DO NOT connect "DIM- to Vo-"

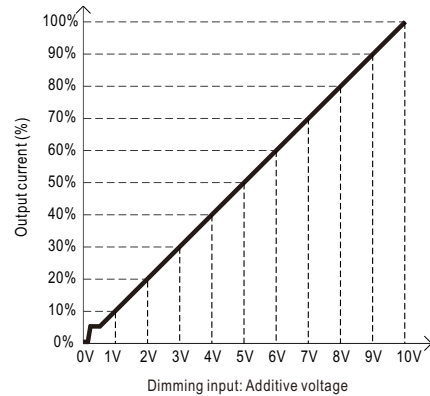


◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

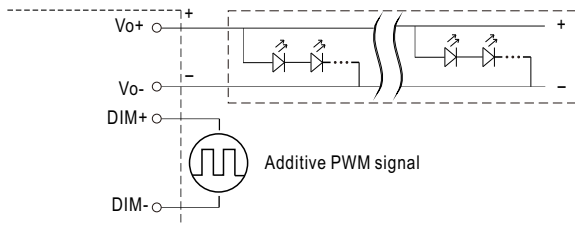


"DO NOT connect "DIM- to Vo-"

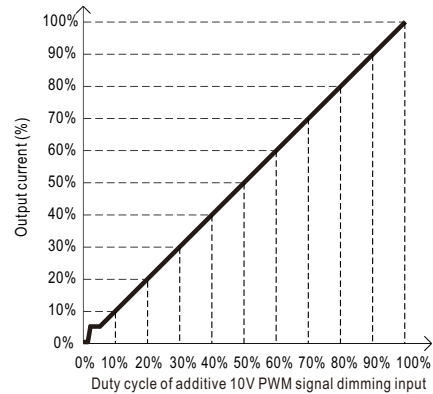

◎ Applying additive resistance:

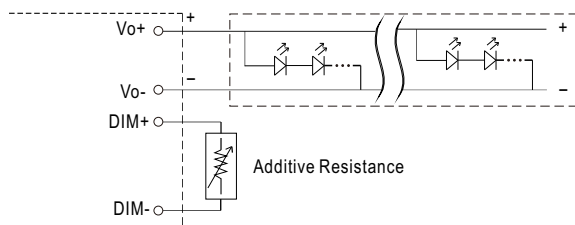

"DO NOT connect "DIM- to Vo-"

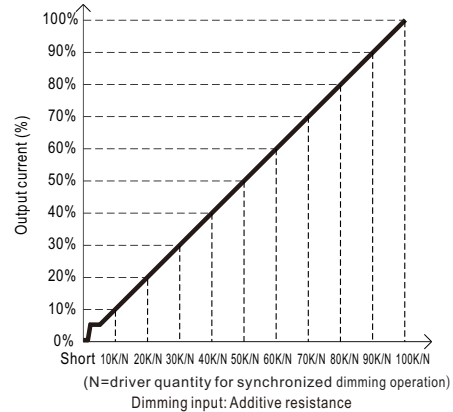



Note : 1. Min. dimming level is about 6% and the output current is not defined when  $0\% < I_{out} < 6\%$ .

2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.


※ Auxiliary DC operation (for BE-type)

- AUX+, with mark \*\*\*, is added for BE-Type, used as the Auxiliary DC output with respect to DIM-.

### OUTPUT LOAD vs TEMPERATURE

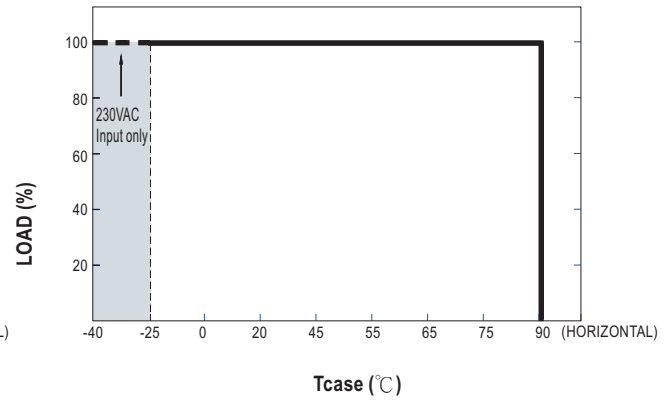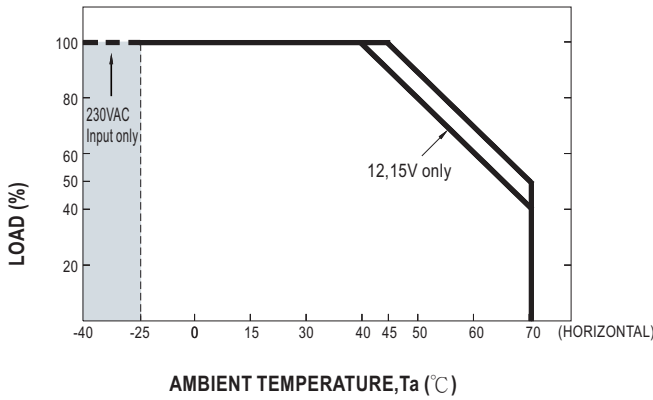


### STATIC CHARACTERISTIC

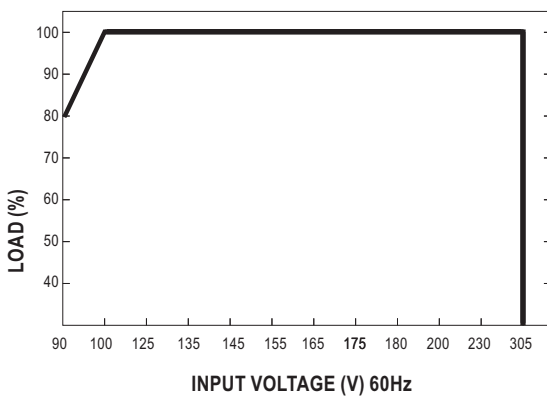

※ De-rating is needed under low input voltage.


### POWER FACTOR (PF) CHARACTERISTIC

※ Tcase at 80°C

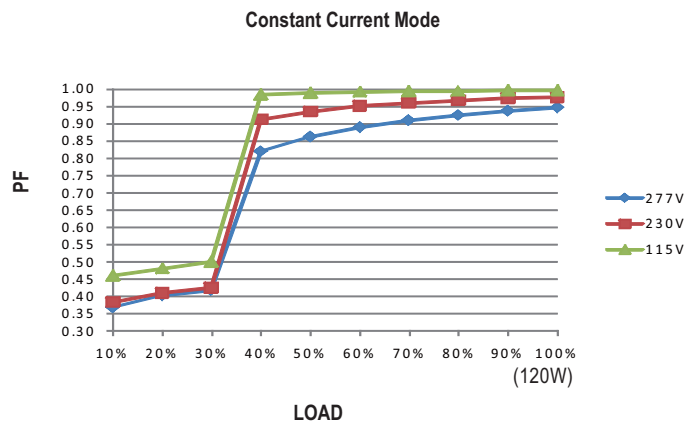

### TOTAL HARMONIC DISTORTION (THD)


※ 48V Blank-Type Model, Tcase at 80°C

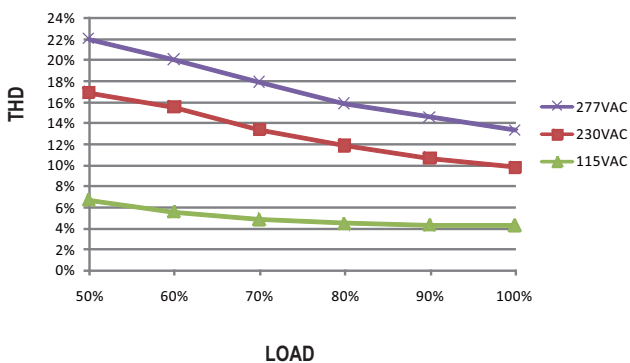


### EFFICIENCY vs LOAD

NPF-120D series possess superior working efficiency that up to 90% can be reached in field applications.

※ 48V Blank-Type Model, Tcase at 80°C

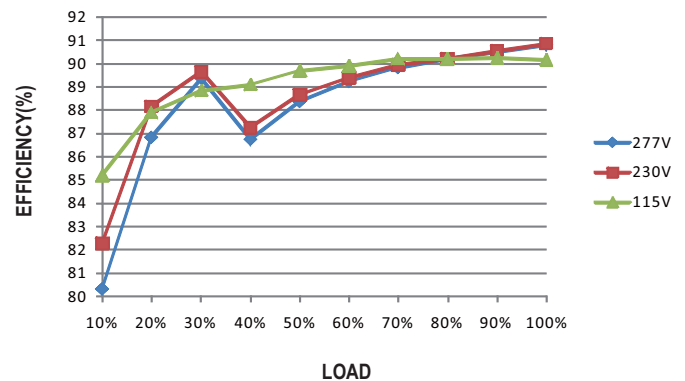

■ LIFE TIME


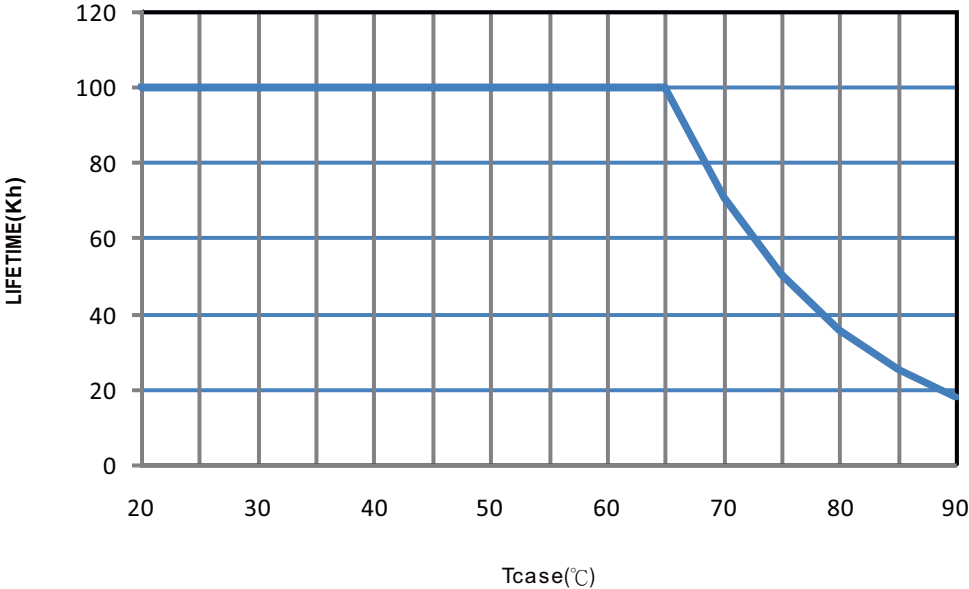


**MECHANICAL SPECIFICATION**



Case No. PWM-120

Unit:mm


※ **Blank-Type**

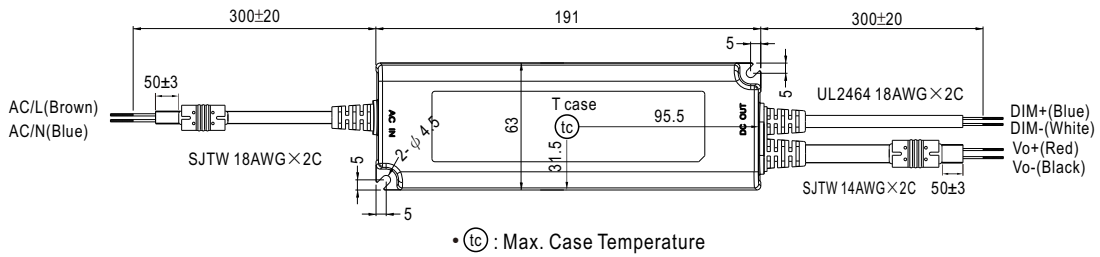

※ **BE-Type**

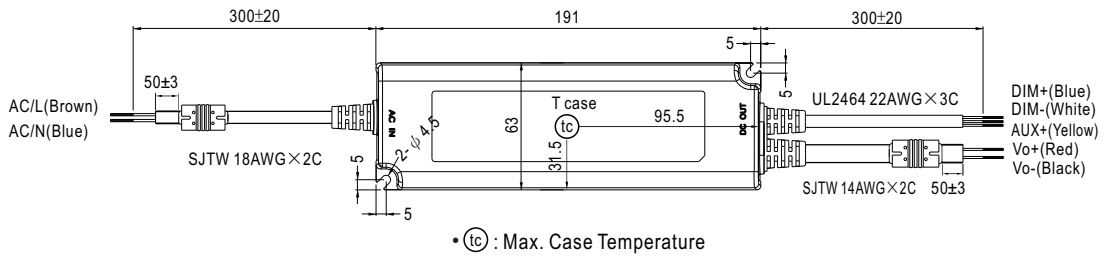

**Recommend Mounting Direction**



**INSTALLATION MANUAL**

Please refer to: <http://www.meanwell.com/manual.html>