


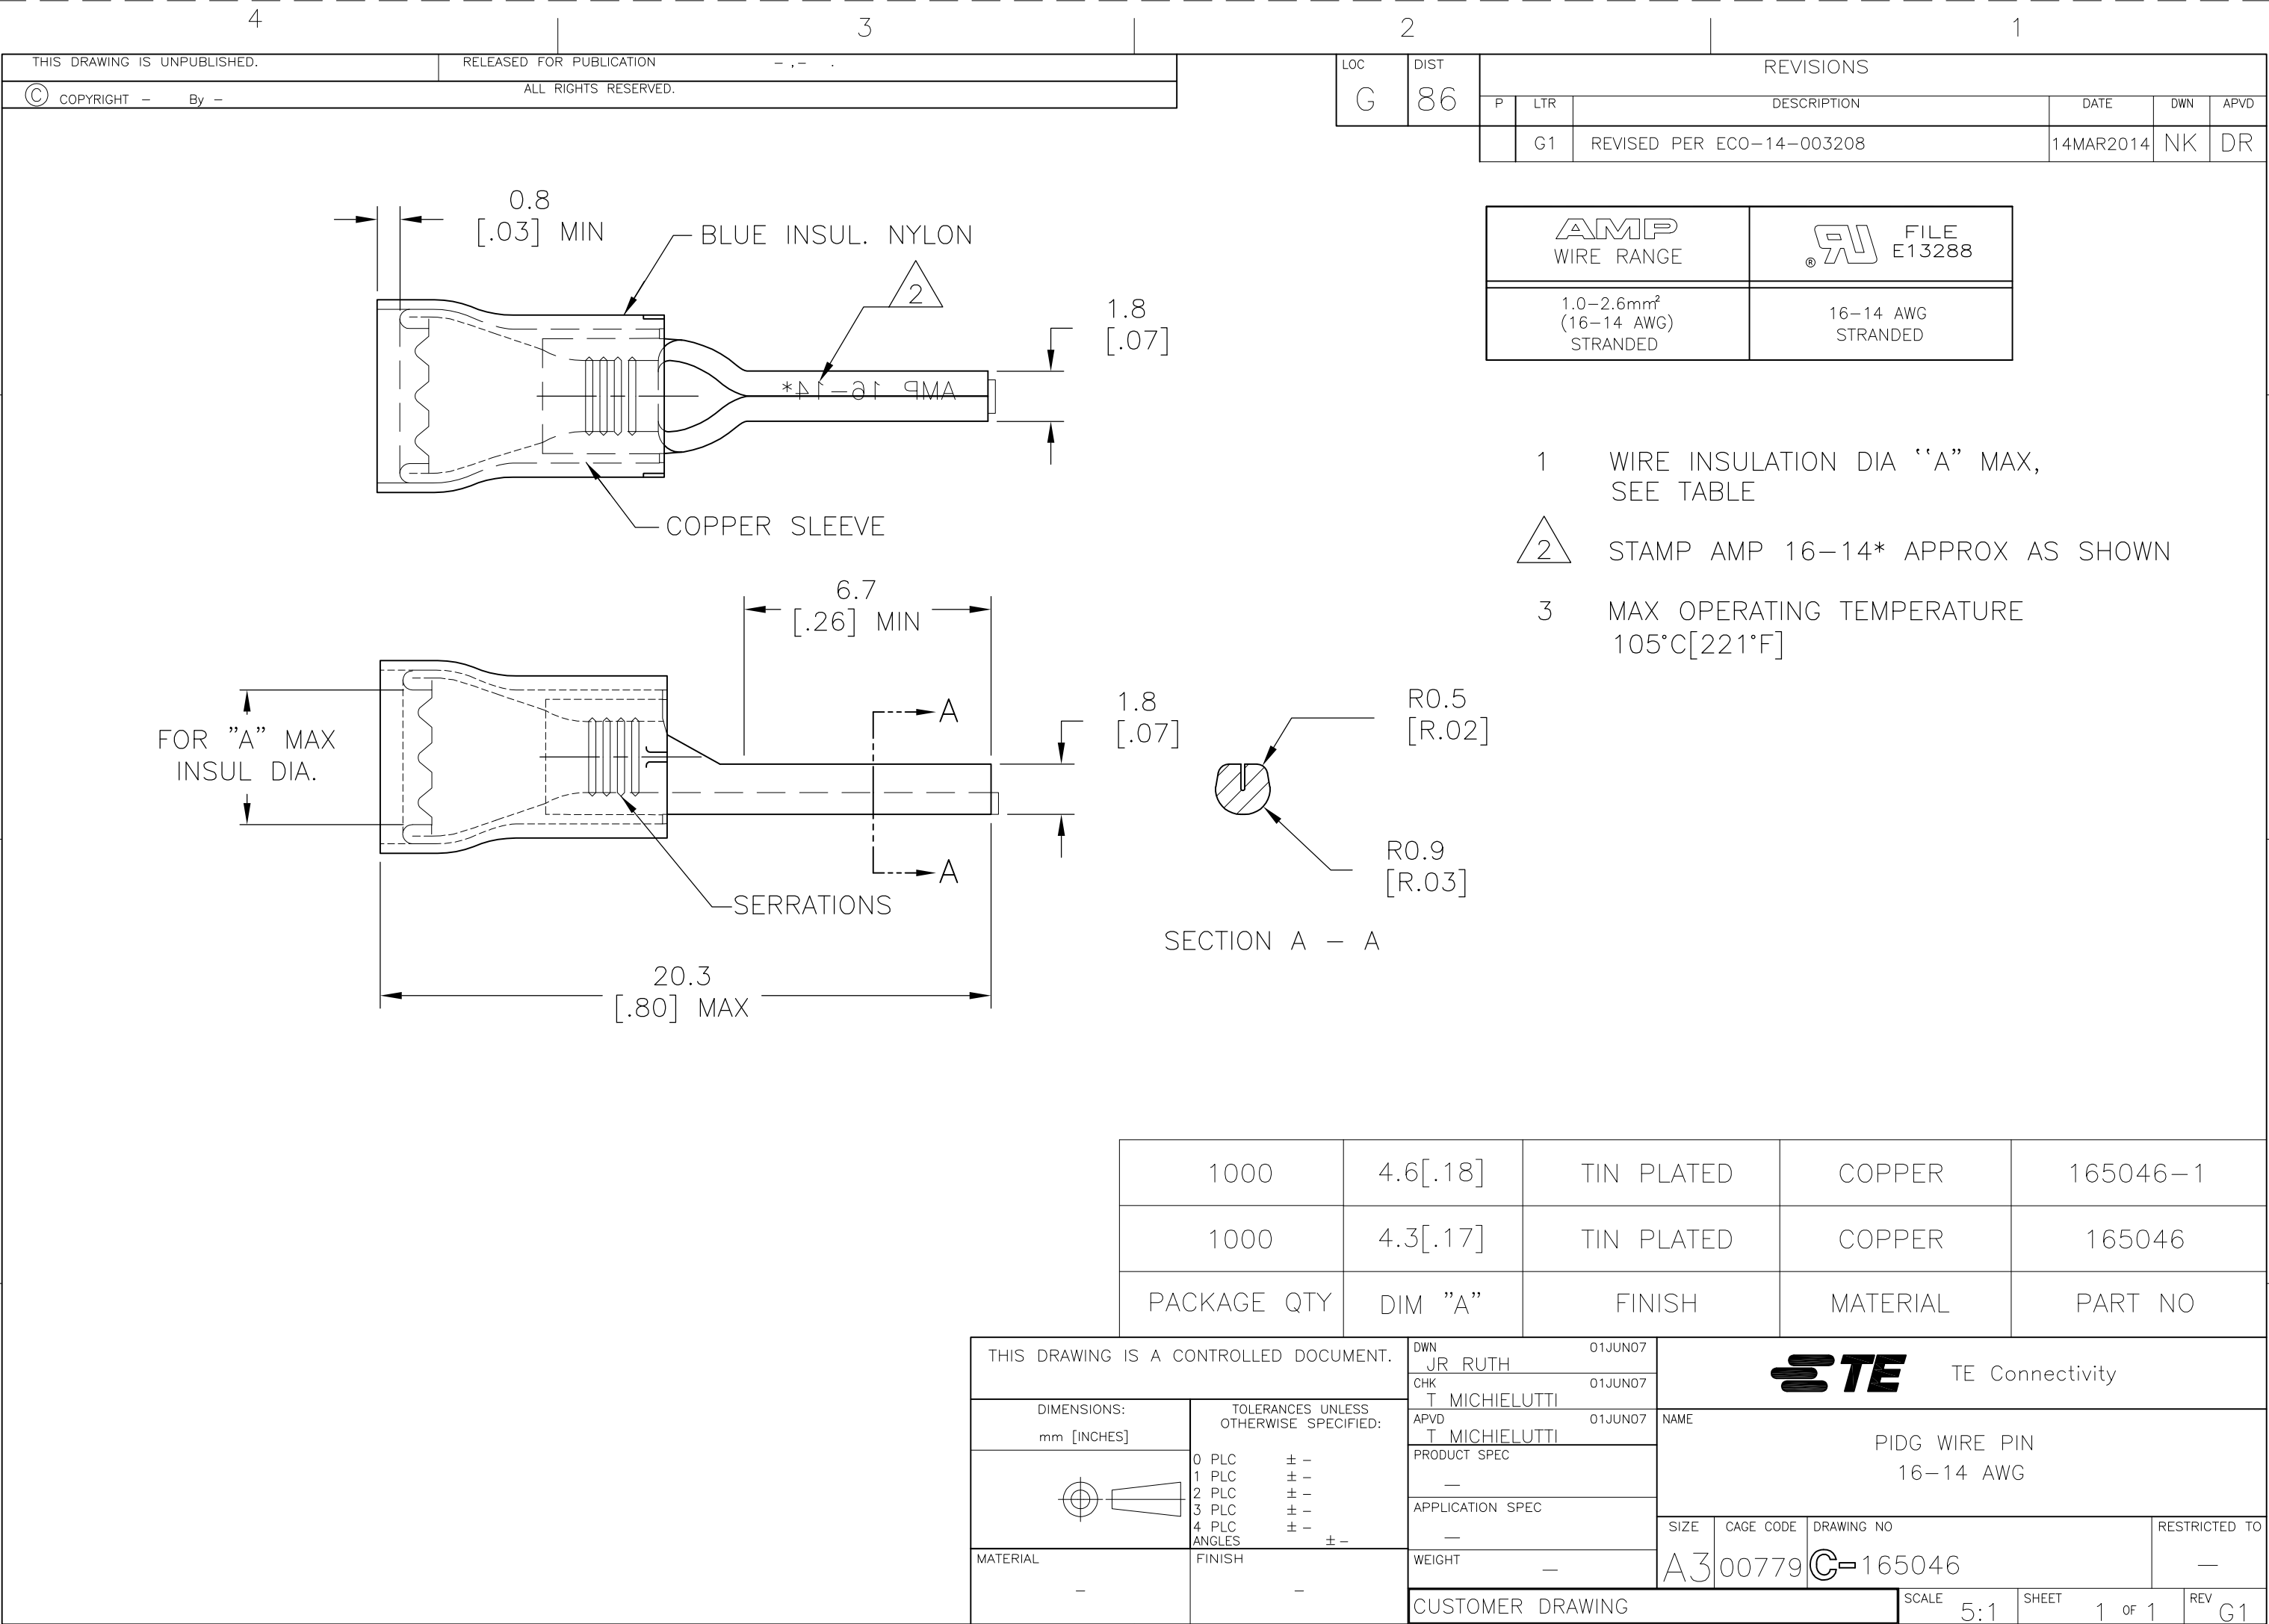

1

WIRE INSULATION DIA "A" MAX, SEE TABLE

2

STAMP AMP 16-14* APPROX AS SHOWN

3

MAX OPERATING TEMPERATURE 105°C[221°F]

0.8

[.03] MIN

BLUE INSUL. NYLON

2

1.8

[.07]

COPPER SLEEVE

6.7

[.26] MIN

FOR "A" MAX INSUL DIA.

SERRATIONS

20.3

[.80] MAX

1.8

[.07]

R0.5

[R.02]

R0.9

[R.03]

SECTION A - A

1000

4.6[.18]

TIN PLATED

COPPER

165046-1

1000

4.3[.17]

TIN PLATED

COPPER

165046

PACKAGE QTY

DIM "A"

FINISH

MATERIAL

PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

JR RUTH

01JUN07

CHK

T MICHIELUTTI

01JUN07

APVD

T MICHIELUTTI

01JUN07

NAME

PIDG WIRE PIN

16-14 AWG

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

WEIGHT

A3

00779

C-165046

CUSTOMER DRAWING

SCALE

5:1

SHEET

1 OF 1

REV

G1

DIMENSIONS:

mm [INCHES]

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

± -

± -

± -

± -

± -

± -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

FINISH

-

1470-19

(3/11)