

Product description

Contacts: 5, Cable outlet: 6 - 8 mm, female cable connector, shieldable, screw terminal connection, static ring version, UL approval

Area

M12-B Series 715


Order number

99 1436 810 05


Illustration



Scale drawing

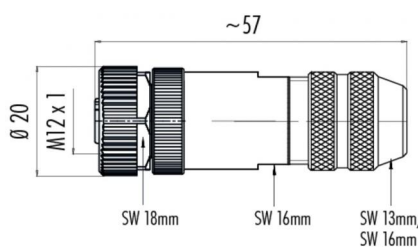


Contact arrangement



	X	Y
1	-2,50	0,00
2	0,00	2,50
3	2,50	0,00
4	0,00	-2,50
5	0,00	0,00

Derating curve

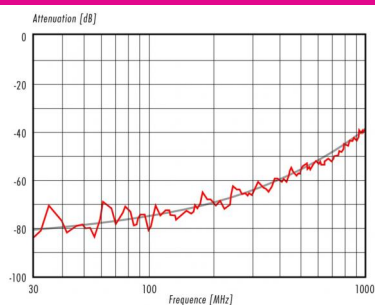

You can find the component part drawing and assembly instructions on the next page.

Technical data

General values

Connector design	female cable connector
Connector locking system	bolted
Termination	screw clamp
Wire gauge (mm)	0.75 mm ²
Wire gauge (AWG)	18
Cable outlet	6,0 - 8,0 mm
Upper limit temperature	85 °C
Lower limit temperature	-40 °C
Customs tariff number	85369010

Cable data

Approval 1	UL
------------	----

Electrical values

Rated current (40 °C)	4 A
Rated voltage	60 V
Rated impulse voltage	1500 V
Pollution degree	3
Overvoltage category	II
Insulating material group	III
Volume resistivity	≤ 3 mΩ
Insulation resistance	≥ 10 ¹⁰ Ω
EMC compliance	shieldable
Degree of protection	IP67
Mechanical operation	> 50 Mating cycles

Material

Contact material	CuZn (brass)
Contact plating	Au (gold)
Contact body material	PA
Housing material	Zinc die-cast nickel-plated

Product description

Contacts: 5, Cable outlet: 6 - 8 mm, female cable connector, shieldable, screw terminal connection, static ring version, UL approval


Area

M12-B Series 715


Order number

99 1436 810 05

Component part drawing

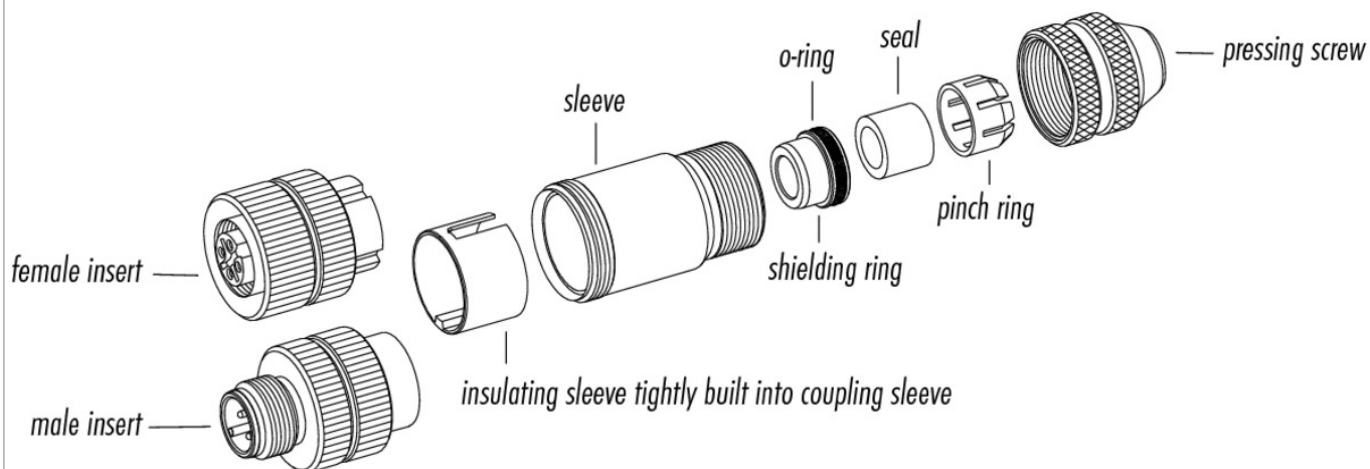

Assembly instructions / Panel cut-out

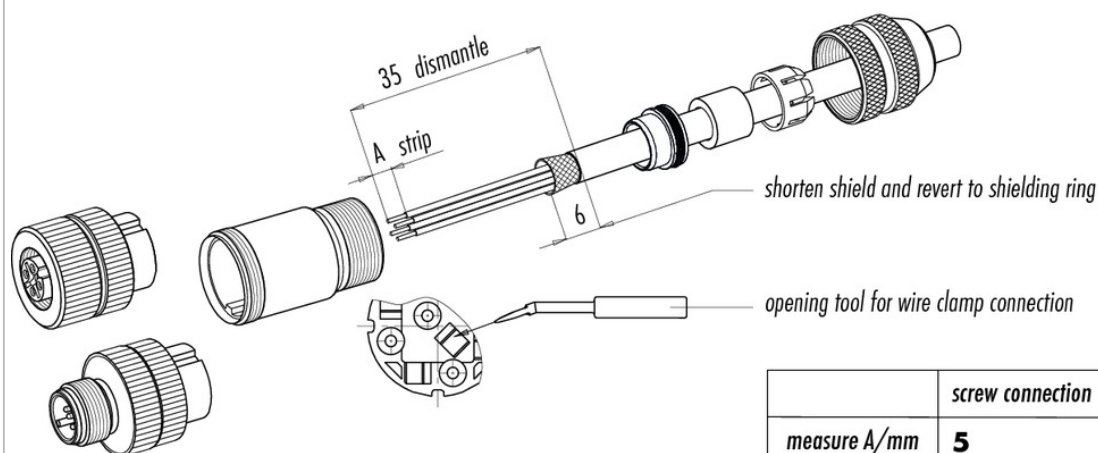

	screw connection	wire clamp connection
measure A/mm	5	7

Product description

Contacts: 5, Cable outlet: 6 - 8 mm, female cable connector, shieldable, screw terminal connection, static ring version, UL approval

Area

M12-B Series 715

Order number

99 1436 810 05

Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).