

Encoder 11mm Size Metal Shaft Reflow Type

EC11J Series



Compact and highly reliable type available in many varieties.



Typical Specifications

Items	Specifications
Rating	10mA 5V DC
Operating life	100,000cycles 500,000cycles 1,000,000cycles
Operating temperature range	-40°C to +85°C

Product Line

Structure	Actuator configuration	Actuator length (mm)	Torque (mN·m)	Number of detent	Number of pulse	Push-on switch	Travel of push-on switch (mm)	Operating life (cycles)	Minimum order unit (pcs.)	Product No.	Drawing No.			
Reflow	Flat	20	12±5	18	9	Without	—	100,000	600	EC11J0920402	1			
										EC11J1520402				
				18	9	With	0.5			500,000	600	EC11J0924411	2	
												EC11J1524413		
				30	15	With	1.5					EC11J0925403		EC11J1525402
				30	15	Without	—					EC11J1520602		
												18		9
				30	15	With	1.5			EC11J1524604				
										18	9	With	1.5	EC11J0925602
				30	15	With	1.5							EC11J1525602
										18	9	Without	—	EC11J0920802
				30	15	Without	—	EC11J1520803						
								18	9	With	0.5	EC11J0924802	2	
				30	15	With	1.5					EC11J1524802		
								18	9	With	1.5	EC11J0925802		
				30	15	With	1.5					EC11J1525802		

Notes

- The operating temperature range for automotive applications can be raised upon request. Please contact us for details.
- Please place purchase orders per minimum order unit N (integer).

Packing Specifications

Tray

Number of packages (pcs.)		Export package measurements (mm)
1 case /Japan	1 case /export packing	
300	600	369 × 283 × 263

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

Metal
Shaft

Insulated
Shaft

Hollow
Shaft

Ring
Type


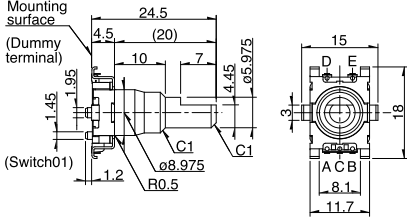
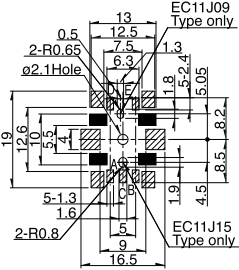

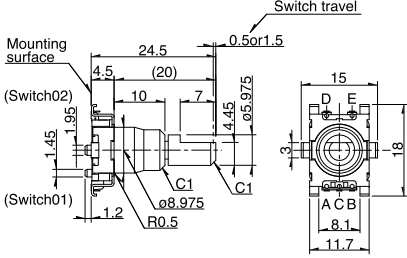
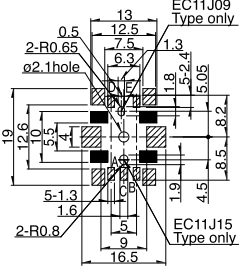


Automotive
Use

Refer to P.212 for product varieties.
Refer to P.217 for product specifications.
Refer to P.212 for soldering conditions.

Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
1	<p>Reflow applicable parts</p> 	 <p>Mounting surface (Dummy terminal)</p> <p>(Switch01)</p> <p>24.5 (20) 10 7 4.45 ø5.975 4.5 1.45 1.95 R0.5 C1 C1 ø8.975 1.2</p> <p>15 D E A C B 8.1 11.7 18</p>	 <p>EC11J09 Type only</p> <p>EC11J15 Type only</p> <p>PC board mounting detail A slant line part hows the solder land black part: Do not solder and wiring for electrical contact</p>
2	<p>Reflow applicable parts with push-on switch (travel 0.5mm/1.5mm)</p> 	 <p>Mounting surface (Switch02)</p> <p>(Switch01)</p> <p>24.5 (20) 10 7 4.45 ø5.975 4.5 1.45 1.95 R0.5 C1 C1 ø8.975 1.2</p> <p>Switch travel 0.5 or 1.5</p> <p>15 D E A C B 8.1 11.7 18</p>	 <p>EC11J09 Type only</p> <p>EC11J15 Type only</p> <p>PC board mounting detail A slant line part hows the solder land black part: Do not solder and wiring for electrical contact</p>

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line Package Type

TACT Switch™

Custom-Products

Metal Shaft

Insulated Shaft

Hollow Shaft


Ring Type




Automotive Use

Product Specifications

Output Wave

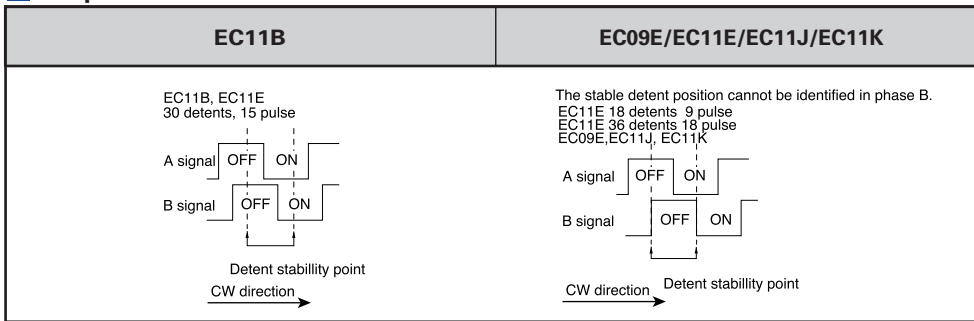

Circuit Diagram



Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products


Metal
Shaft

Insulated
Shaft

Hollow
Shaft

Ring
Type

EC11EH

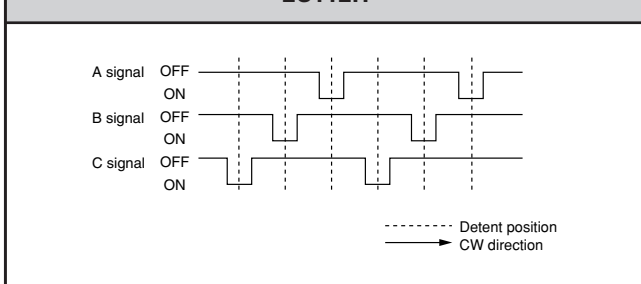

EC20A


Shaft rotational Direction	Signal	Output
Clockwise	A (Terminal A-C)	OFF ON
	B (Terminal B-C)	OFF ON
Counter-clockwise	A (Terminal A-C)	OFF ON
	B (Terminal B-C)	OFF ON

The dotted lines indicate detent positions


Sliding Noise

EC09E	EC11B	EC11E
<p>$V_1 = V_2 = 1.5V$ max.</p> <p>Measurement condition : Rotation speed 360°/s t : Masking time to avoid chattering</p>		
<p>At R = 5kΩ Chattering: 5ms max. Bounce: 2ms max.</p>	<p>At R = 5kΩ Chattering: 2ms max. Bounce : 2ms max.</p>	<p>At R = 5kΩ Chattering : 3ms max. Bounce : 2ms max.</p>


EC11EH

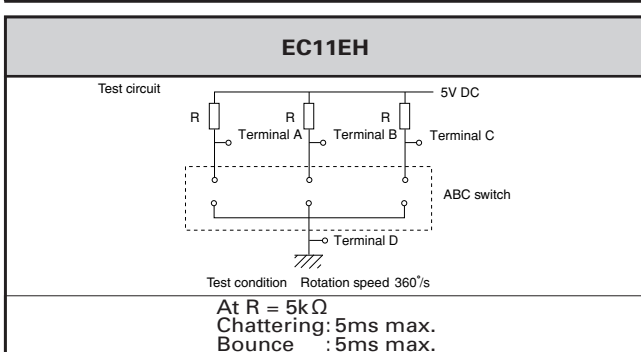

EC20A

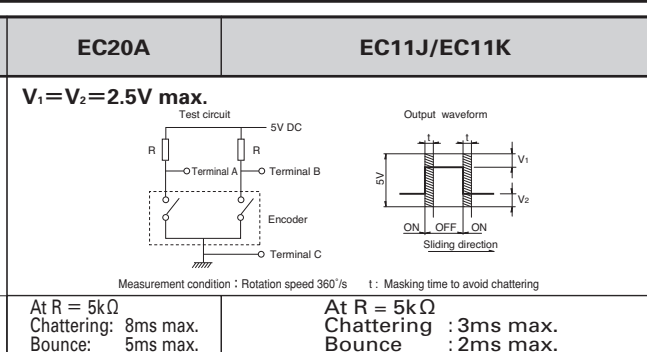


EC11J/EC11K

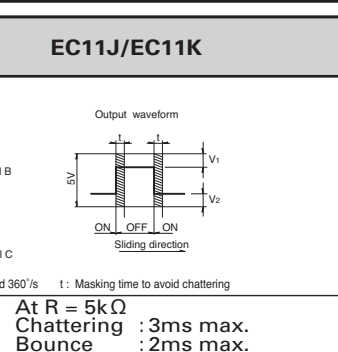

Attached Parts



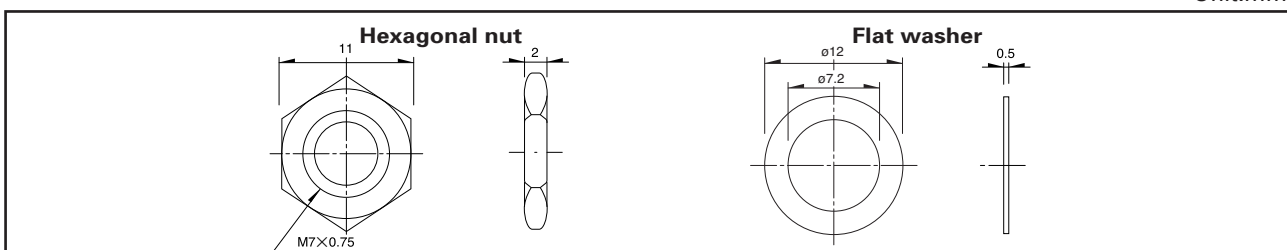

EC11B Series

Unit:mm



Automotive
Use

List of Varieties

Type	Metal shaft				
	11mm size		20mm size		
Series	EC11K	EC11J	EC20A/RK203	EM20B	
Photo					
Output	Incremental				
Outline specifications	Shaft types	Single-shaft			
	Operating direction	Vertical			
	Number of pulse/ Number of detent	9/18 15/30		18/18 40/40	
	Push switch (Travel mm)	Without With (0.5, 1.5)		Without With (0.5)	
	Optional function	Display function			
Dimensions (mm)	W	11.7		20	
	D	12	14.2	19.2 22.25	
	H	4.5		10 13	
Soldering	Manual soldering	350°C max. 3s max.			
	Dip soldering	260±5°C, 3±1s	—	260±5°C, 5±1s 260°C max. 3s max.	
	Reflow soldering	—	Please see P.212	—	
Operating temperature range	-40°C to +85°C			-10°C to +70°C	
Automotive use	○	○	○	—	
Maximum operating current (Resistive load)	10mA			—	
Electrical performance	Output signal	Output of A and B signals, proportionate to phase difference			V _H : +4.0V min. V _{LO} : 0.5V max. (Isink=5mA)
	Output wave	Please see P.217			—
	Output phase	—			A, B (Squarewave)
	Sliding noise	Please see P.217			—
	Insulation resistance	100MΩ min. 250V DC		10MΩ min. 50V DC	100MΩ min. 250V DC
	Voltage proof	300V AC for 1minute		50V AC for 1minute	300V AC for 1minute
Mechanical performance	Rotational torque	—			7mN·m max.
	Detent torque	12±5mN·m		40±20mN·m	8±5mN·m
	Push-pull strength	100N			—
Environmental performance	Cold	-40±2°C for 240h		-40±3°C for 240h -30±3°C for 240h	
	Dry heat	85±2°C for 240h		85±3°C for 240h 80±3°C for 240h	
	Damp heat	60±2°C, 90 to 95% RH for 240h		60±3°C, 90 to 95%RH for 240h 40±2°C, 90 to 95%RH for 240h	
Page	204	210	213	215	

Push-on Switch Specifications

Items	EC11K/EC11J	EC20A	EM20B
Contact arrangement	Single pole and single throw (Push-on)		
Travel (mm)	0.5±0.3	1.5±0.5	0.5 ^{+0.4} _{-0.3}
Operating force (N)	5±2	4±2	6±3
Rating	0.1A 5V DC		0.1A 5V DC
Contact resistance	100mΩ for initial period; 200mΩ after operating life		
Operating life	1,000,000 times min.	100,000 times min.	20,000times min. 25,000times min.

Note

○marks in "Available for automotive use" indicate that some of the series products can work at the operating temperature range from -40°C to +85°C.

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
ProductsMetal
ShaftInsulated
ShaftHollow
ShaftRing
Type

Product Varieties

Shaft Dimensions

1. Single-shaft Type

1) Knurled Type

Unit:mm

Configuration(Shaft diameter: $\phi 6$)

Detailed dimensions

L ₁	L _B	l ₁	S ₁
15	5	6	7
20	10	6	7

2) Flat Type

Unit:mm

Configuration(Shaft diameter: $\phi 5.975$)

Detailed dimensions

L ₁	L _B	l
15	7	5
20	10	7

3) Slotted Type

Unit:mm

Configuration(Shaft diameter: $\phi 5.975$)

Detailed dimensions

L ₁	L _B
15	7
20	10


Notes

- The highlighted figures in shaft types refer to Product Specifications in P.215.
- Products other than those listed in the above chart are also available. Please contact us for details

Soldering Conditions

Example of Reflow Soldering Condition

- Heating method: Double heating method with infrared heater.
- Temperature measurement: Thermocouple 0.1 to 0.2 ϕ CA (K) or CC (T) at soldering portion (copper foil surface). A heat resisting tape should be used for fixed measurement.
- Temperature profile

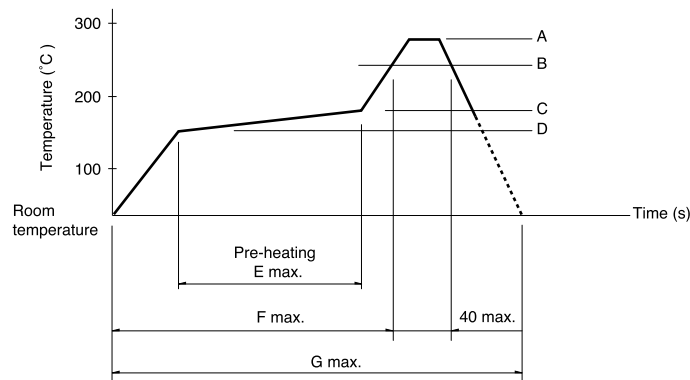

Series(Reflow type)	A (°C) 3s max.	B (°C)	C (°C)	D (°C)	E (s)	F (s)	G (s)
EC11J	260	230	180	150	120	—	240

Notes

- The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the PC board's material, size, thickness, etc. The above-stated conditions shall also apply to switch surface temperatures.
- Soldering conditions differ depending on reflow soldering machines. You are requested to verify the soldering conditions thoroughly beforehand.

Detector
Push
Slide
Rotary
Encoders
Power
Dual-in-line
Package Type
TACT Switch™
Custom-
Products

Metal
Shaft
Insulated
Shaft
Hollow
Shaft
Ring
Type