




<b>DATA SHEET</b>	5550 6585
<b>SILVYN® FPAG</b>	valid from : 26.10.2004

The SILVYN® FPAG straight conduit gland gives a high tensile strength with its all round teeth and vibration protection.

The gland can be removed from the conduit using a small screwdriver.

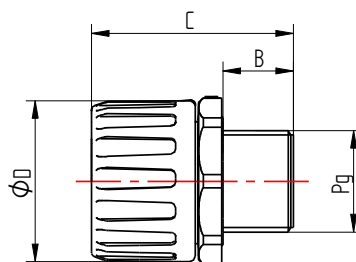

#### Dimension table:

Part no.	connection thread	B	C	ØD	suitable conduit
5550 6585	SILVYN FPAG Pg 7	9,0	32,5	19,0	FPAS 10
5550 6605	SILVYN FPAG Pg 9	10,0	37,0	23,5	FPAS 13
5550 6625	SILVYN FPAG Pg 11	10,0	36,0	28,5	FPAS 16
5550 6635	SILVYN FPAG Pg 13,5	10,0	36,0	28,5	FPAS 16
5550 6655	SILVYN FPAG Pg 16	11,0	41,0	32,0	FPAS 21
5550 6665	SILVYN FPAG Pg 21	12,0	47,0	44,0	FPAS 28
5550 6675	SILVYN FPAG Pg 29	12,0	49,0	50,5	FPAS 34
5550 6685	SILVYN FPAG Pg 36	12,0	56,5	62,7	FPAS 42
5550 6695	SILVYN FPAG Pg 48	12,0	61,0	76,0	FPAS 54

#### Technical features:

Connecting thread: Pg 7 to Pg 48 in acc. to DIN 40 430  
Protection class: IP 66 bar, test in acc. to DIN 40 050  
Temperature range: - 40°C to +135°C  
Colour RAL: 9005 (UV resistant)  
(7001)  
Properties: Anti-vibration and tamper resistant  
High pull off strength  
Flame retardant UL 94 V2  
Halogen free  
Oil and solvent resistant  
Material: PA 66

Approvals:



For more information please see our current catalogue.

Please do not hesitate to contact our laboratory if there any questions regarding resistance against aggressive agents and special oil.

elaborated by: M. Schmid	document: DB55506585EN	page 1 of 1
-----------------------------	------------------------	-------------