
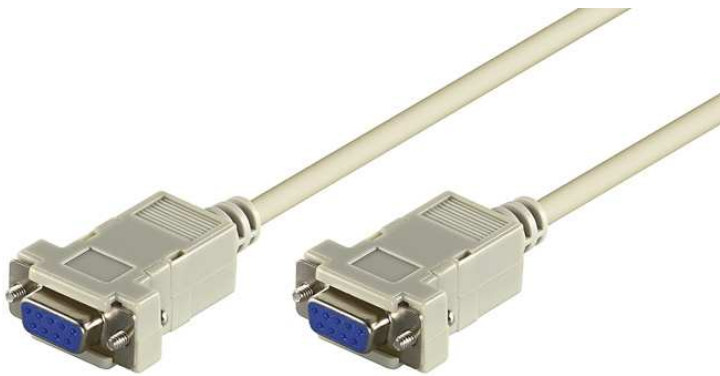



Belegung / pinout :

DB9F	-	DB9F
6+1	-	4
2	-	3
3	-	2
4	-	6+1
5	-	5
7	-	8
8	-	7

Schirmung - Schirmung
screening - screening



- Anschlusskabel D-SUB; Lose Ware
- 9 pol.D-SUB Buchse > 9 pol.D-SUB Buchse
- seriell / serial Nullmodem Konfiguration
- z.B. zum direkten Verbinden von zwei PCs
- RoHS-konform

- connection cable SUB-D; bulk
- 9 pin SUB-D jack > 9 pin SUB-D jack
- serial nullmodem connected
- e.g. to connect to PCs
- RoHS-compliant

Änderungen

Änderungen		Datum	Name
Datum	Name	gez.: 07.07.2009	li
		gepr.: 07.07.2009	li
		Norm:	

Bezeichnung
CAK D-SUB 300 9F/9F
2m NULLMODEM 68484



Blatt

Zeichnungs-Nr.:

von