

Groove-depth 9 mm Cable/Connector type
Photomicro Sensors

BS5 Series
INSTRUCTION MANUAL

DRW200019AA

Autonics

Thank you for choosing our Autonics product.

Please read and understand the instruction manual and manual thoroughly before using the product.

For your safety, please read and follow the below safety considerations before using.

For your safety, please read and follow the safety considerations written in the instruction manual, other manuals and Autonics website.

Keep this instruction manual in a place where you can find easily.

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

Follow Autonics website for the latest information.

Safety Considerations

- Observe all 'safety considerations' for safe and proper product operation to avoid hazards.
-  symbol represents caution due to special circumstances in which hazards may occur.

 **Warning** Failure to follow instructions may result in serious injury or death.

01. Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss. (e.g., nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime/disaster prevention devices, etc.) Failure to follow this instruction may result in personal injury, fire or economic loss. Do not use the unit in the place where flammable/explosive/corrosive gas, high humidity, direct sunlight, radiant heat, vibration, impact, or salinity may be present.

Failure to follow this instruction may result in explosion or fire.

02. Do not disassemble or modify the unit.

Failure to follow this instruction may result in fire.

Do not connect, repair, or inspect the unit while connected to a power source.

Failure to follow this instruction may result in fire.

03. Check 'Connections' before wiring.

Failure to follow this instruction may result in fire.

 **Caution** Failure to follow instructions may result in injury or product damage.

01. Use the unit within the rated specifications.

Failure to follow this instruction may result in fire or shortening the life cycle of the product.

02. Use dry cloth to clean the unit, and do not use water or organic solvent.

Failure to follow this instruction may result in fire or electric shock.

Cautions during Use

- Follow instructions in 'Cautions during Use'. Otherwise, It may cause unexpected accidents.
- Use the product, 0.5 sec after supplying power. When using separate power supply for the sensor and load, supply power to sensor first.
- 5-24VDC power supply should be insulated and limited voltage/current or Class 2, SELV power supply device.
- Wire as short as possible and keep away from high voltage lines or power lines, to prevent inductive noise.
- When using sensor with the equipment which generates noise (switching regulator, inverter, servo motor, etc.), ground F.G. terminal of the equipment.
- This unit may be used in the following environments.
 - Indoors (in the environment condition rated in 'Specifications')
 - Altitude max. 2,000m
 - Pollution degree 2
 - Installation category II

















Ordering Information

This is only for reference.

For selecting the specific model, follow the Autonics web site.

BS 5 - ① ② - ③

① Appearance+Connection

	Cable type		Connector type
K1		K2	
T1	 Distance from the center of sensing to mounting surface: 7.3 mm	T2	 Distance from the center of sensing to mounting surface: 7.3 mm
L1		L2	
Y1		Y2	
V1		V2	
TA1	 Distance from the center of sensing to mounting surface: 10 mm	TA2	 Distance from the center of sensing to mounting surface: 10 mm
F1		F2	
R1		R2	

② Indicator

M: Turns ON under the light received condition

R: Turns ON under the light interrupted condition

③ Control output

No mark: NPN open collector output

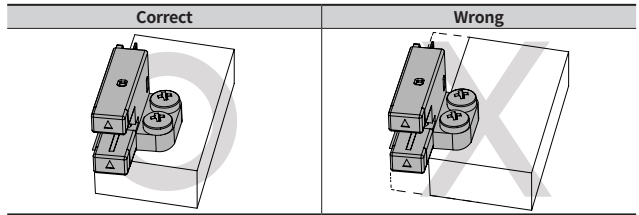
P: PNP open collector output

Sold Separately

- Socket: CT-01 (connector type), CT-02 (cable type, length: 1 m)


Cautions for Installation

- Tighten the screw with tightening torque under 0.49 N m.
- In case of F and R type, as shown below, make sure that the bottom of the product and the mounting surface are in direct contact with each other.




Connection

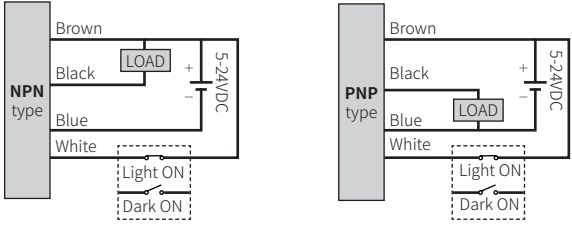■ Cable type



■ Connector type

- For LOAD connection, follow the cable type connection.
- Be sure to connect the unit using the dedicated socket (CT-01 or CT-02, sold separately). If it is soldered on the unit terminal pin directly not using the connector socket (CT-01), it may cause product damage.




Pin	Color	Function
①	Brown	+V
②	White	Control
③	Black	Output
④	Blue	0V

■ Selectable operation mode


Operation mode	Connection
Light ON	(White) Control wire connects with (Brown) +V
Dark ON	(White) Control wire connects with (Blue) 0V or does NOT connect

Operation Timing Chart


Model		Indicator turns ON under light received condition		Indicator turns ON under light interrupted condition	
Received light		Received Interrupted		Received Interrupted	
Light ON	Operation indicator	ON OFF		ON OFF	
	Transistor output	ON OFF		ON OFF	
Dark ON	Operation indicator	ON OFF		ON OFF	
	Transistor output	ON OFF		ON OFF	

Inner Circuit

■ NPN open collector output



■ PNP open collector output



- OCP (over current protection), SCP (short circuit protection)
- If short-circuit the control output terminal or supply current over the rated specification, normal control signal is not output due to the protection circuit.

Specifications

Series	BS5
Sensing type	Through-beam
Sensing distance	5 mm
Sensing target	≥ Ø 0.8 mm × 2 mm of opaque materials
Hysteresis	≤ 0.05 mm
Response time	Received light: ≤ 20 μs , Interrupted light: ≤ 100 μs
Response frequency ¹⁾	2 kHz
Power supply	5-24 VDC≐ ±10 % (ripple P-P: ≤ 10 %)
Current consumption	≤ 30 mA
Light source	Infrared LED
Peak emission wavelength	940 nm
Operation mode	Light ON-Dark ON selectable (control wire)
Control output	NPN open collector / PNP open collector output model
Load voltage	≤ 30 VDC≐
Load current	≤ 100 mA
Residual voltage	NPN: ≤ 1.2 VDC≐ PNP: ≤ 1.2 VDC≐
Protection circuit	Reverse power polarity protection circuit, output short overcurrent protection circuit
Indicator	Operation indicator (red LED)
Connection	Cable type / Connector type model
Insulation resistance	≥ 20 MΩ (250 VDC≐ megger)
Noise immunity	The square wave noise (pulse width: 1μs) by the noise simulator ± 240 VDC≐
Dielectric strength	1,000 VAC 50/60 Hz for 1 minute
Vibration	1.5 mm amplitude (max. acceleration 196 m/s ²) at frequency of 10 to 2,000 Hz in each X, Y, Z direction for 2 hours
Shock	15,000 m/s ² (approx. 1,500 G) in each X, Y, Z direction for 3 times
Ambient illumination	Fluorescent lamp: ≤ 1,000 lx (receiver illumination)
Ambient temperature	-20 to 55°C, storage: -25 to 85°C (a non freezing or condensation environment)
Ambient humidity	35 to 85%RH, storage: 35 to 85%RH (a non freezing or condensation environment)
Protection structure	IP50 (IEC standard)
Material	Case: PBT, Sensing part: PC
Cable	Ø 3 mm, 4-wire, 1 m
Core	AWG28 (0.08 mm), 19-core, insulator out diameter: Ø 0.88 mm
Approval	
Weight	Cable type: ≈50 g, Connector type: ≈30 g

1) Response frequency is the value getting from revolving the circle panel below.

