

PRODUCT INFORMATION


GOF SIMPLEX Pigtail

12x assorted colour coded pigtails with various types of connectors (LC, ST, LC) with Singlemode OS2 and Multimode OM1, OM2, OM3, OM4 fibres

12x assorted colour coded pigtails with various types of connectors (LC, ST, LC) with Singlemode OS2 and Multimode OM1, OM2, OM3, OM4 fibres

Info

Pre-assembled simplex tight-buffered optical fibre with a durable ceramic ferrule connector

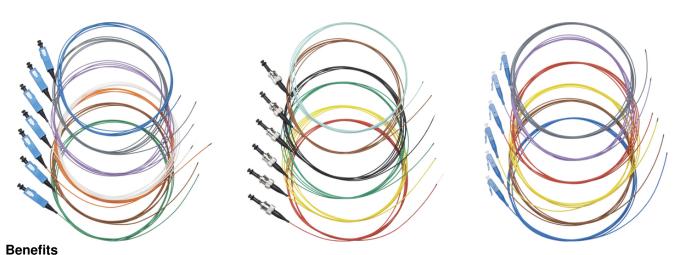

Ease of installation and assembly Create a direct plug connection for installation cables with splicing Zero electromagnetic interference as the cable contains no metal (totally dielectric)

Application range

For indoor use Connection to an end optical device

Product features

High flexibility Cable termination with durable ceramic ferrules Set consisting of 12 colour-coded pigtails (red, green, blue, yellow, white, gray, brown, violet, turquoise, black, orange, pink)

Norm references / Approvals

LC comply with IEC standard 61754-20 SC comply with IEC standard 61754-4 ST comply with IEC standard 61754-2

Product Make-up

Tight buffered simplex fibres Connector: LC, SC or ST Colour-coded primary and secondary coatings Standard length: 2 m

Last Update (10.10.2018) ©2018 Lapp Group - Technical changes reserved Product Management www.lappkabel.de You can find the current technical data in the corresponding data sheet. PN 0456 / 02_03.16



GOF SIMPLEX Pigtail

Technical Data	
Classification ETIM 5:	ETIM 5.0 Class-ID: EC000748 ETIM 5.0 Class-Description: Pigtail
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000748 ETIM 6.0 Class-Description: Pigtail
Dimensions:	Primary coated fibre: 250µm tight-buffer (secondary coated fibre): 900µm
Fibre type:	GOF - Glass Optical Fibre
Standard designation:	J-VH 1G/E
Optical fibre type:	Core material: glass Cladding material: glass
Permissible tensile force:	Fixed installation: 100 N
Temperature range:	Fixed installation: -20°C to +60°C Occasional flexing: -5°C to +50°C

Note

Other types of connectors (e.g. LC, MTRJ, E2000) are available upon request.Judy Lim:This will not apply to Hitronic anymore, as LC will become a standard product and MTRJ/E2000 will be removed. Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

Article number	Article designation
Article number Multimode G 50 OM4 29310402	
ିର୍ଣ୍ଣ 29310402	GOF Simplex Pigtail SC G50 OM4, 2m
j ⊆ 29320402	GOF Simplex Pigtail ST G50 OM4, 2m
29320402 29330402 29330402 Nultimode C 50 OM2	GOF Simplex Pigtail LC G50 OM4, 2m
N Multimodo C EO OMO	
1 S Multimode G 50 OM3 29310302	GOF Simplex Pigtail SC G50 OM3, 2m
29320302	GOF Simplex Pigtail ST G50 OM3, 2m
29310302 29320302 29330302 Multimode G 50 OM2	GOF Simplex Pigtail LC G50 OM3, 2m
Multimode G 50 OM2	
	GOF Simplex Pigtail SC G50 OM2, 2m
29310202 29320202 29330202	GOF Simplex Pigtail ST G50 OM2, 2m
29330202	GOF Simplex Pigtail LC G50 OM2, 2m
Multimode G 62.5 OM1	
29310102	GOF Simplex Pigtail SC G62.5, 2m
29320102	GOF Simplex Pigtail ST G62.5, 2m
29330102	GOF Simplex Pigtail LC G62.5, 2m
Single-mode E 9 OS2	
29310902	GOF Simplex Pigtail SC E9 OS2, 2m
29320902	GOF Simplex Pigtail ST E9 OS2, 2m
29330902	GOF Simplex Pigtail LC E9 OS2, 2m

GOF SIMPLEX Pigtail