



30W HIGH POWER LED

OF-HPW-30EL WHITE



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

Features

- Long operating life
- Highest flux
- Wide range of colors:2500K-25000K
- Lambertian radiation pattern
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam, safe to the touch
- Instant light (less than 100ns)
- Fully dimmable
- No UV
- Superior ESD protection
- Eutectic die bonding
- RoHS compliant


Applications

- Reading lights (car, bus, aircraft)
- LCD Backlights/light Guides
- Fiber optic alternative/ Decorative / Entertainment
- Mini-accent/Up lighters/Down lighters/Orientation
- Indoor/Outdoor commercial and Residential Architectural
- Cove/Under shelf/Task
- Bollards/Security/Garden
- Portable (flashlight, bicycle)
- Edge-lit signs (Exit, point of sale)
- Automotive Exit (Stop-Tail-Turn,CHMSL, Mirror Side Repeat)
- Traffic signaling / Beacons / RailCrossing and Wayside



30W HIGH POWER LED

■ Radiation Pattern

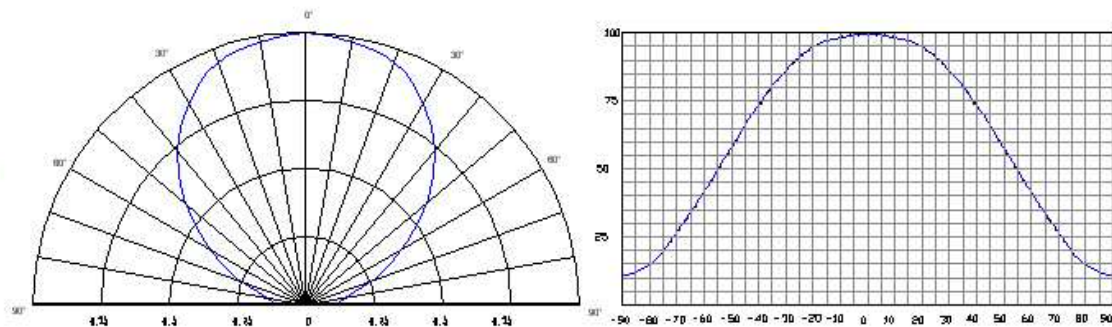

■ Typical Optical/ Electrical Characteristics @T_j=25°C

Item	Symbol	Condition	Min.	Typ.	Mix.	Unit
Forward Voltage	V _F	IF=1.4A		24		V
Reverse Current	I _R	VR=5v	--	--	50	uA
50% Power Angle	2θ _{1/2}	IF=1.4A	--	140	--	deg
Luminous Intensity	φ _v	IF=1.4A	850	1000	1100	lm
Recommend Forward Current	I _F	--	--	1.4	--	A
Chromaticity	T _c	IF=1.4A	5000	6000	7000	K
Chromaticity Coordinates	X	IF=1.4A	--	--	--	--
	Y	IF=1.4A	--	--	--	

Notes: 1. Tolerance of measurement of forward voltage ±0.1V.
 2. Tolerance of measurement of peak Wavelength ±2.0nm.
 3. Tolerance of measurement of luminous intensity ±15%.



30W HIGH POWER LED

■ Absolute Maximum Rating



Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	I_F	1.4	A
Peak Forward Current*	I_{FP}	1.6	A
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	30	W
Electrostatic discharge	E_{SD}	±4500	V
Operation Temperature	T_{OPR}	-40~+80	□
Storage Temperature	T_{STG}	-40~+100	□
Lead Soldering Temperature*	T_{SOL}	Max. 260°C for 6sec Max.	

*IFP Conditions □ Pulse Width ≤ 10msec duty ≤ 1/10

* All high power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly, but we do not recommend lighting the high power products for more than 5 seconds without a appropriate heat dissipation equipment.




■ Typical Optical/Electrical Characteristics Curves

($T_a = 25^\circ\text{C}$ Unless Otherwise Noted)

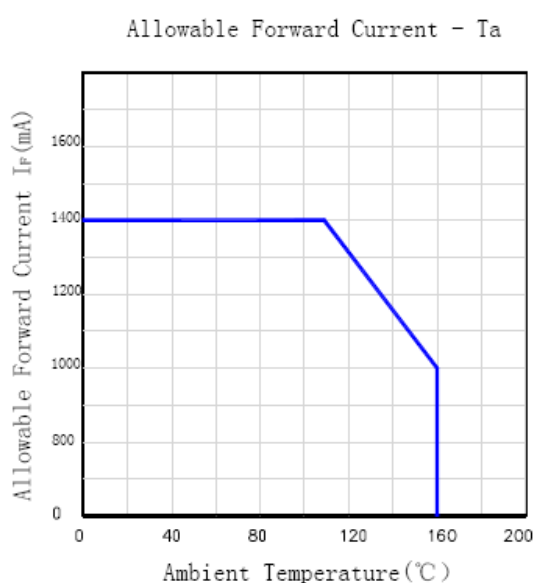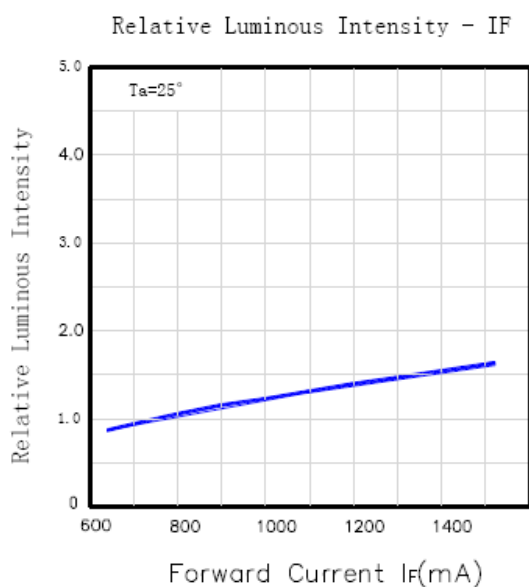



30W HIGH POWER LED

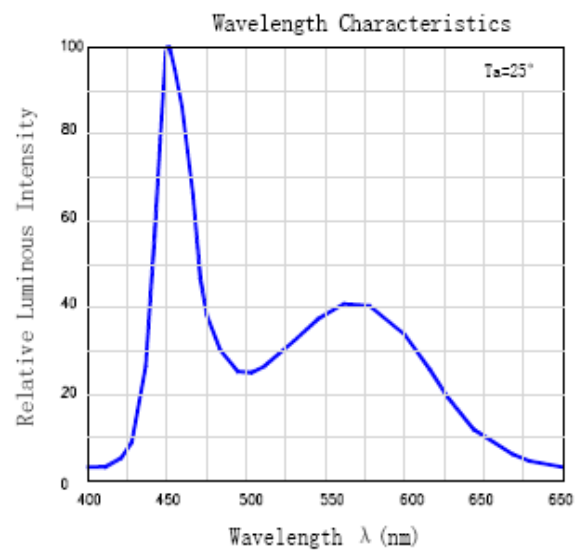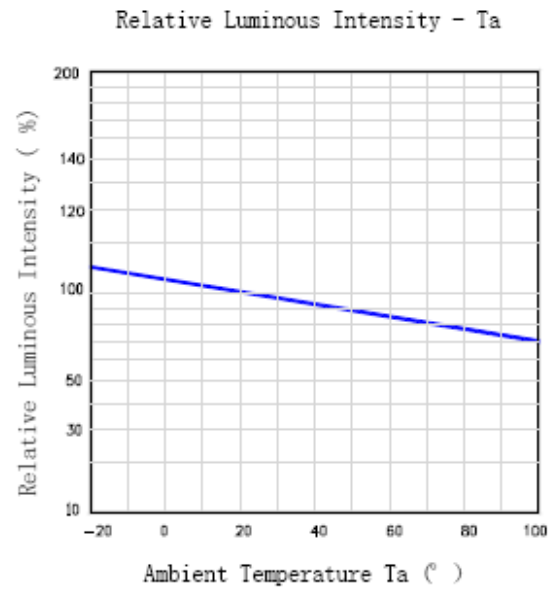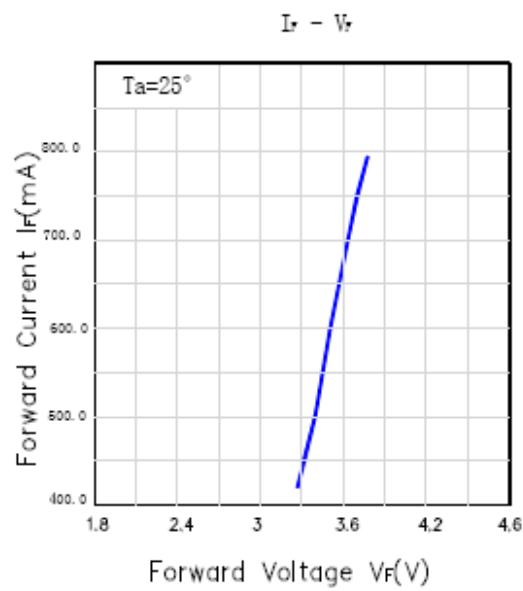

■ Package Dimensions



30W HIGH POWER LED

Notes: 1. All dimension units are millimeters.
2. All dimension tolerance is $\pm 0.2\text{mm}$ unless otherwise noted.