



FRM系列Z型刀插双指示快速熔断器(Class:aR)
FRM Double-indication Series Fuse For Semiconductor Protection




产品型号 Type	额定电压(V) Rated voltage	额定电流(A) Rated current	尺寸Dimension(mm)						
			A	B	C	D	E	F	G
FRM000ZS78	IEC/UL AC690/700V	10~250	78	54	21	6	40	53	15

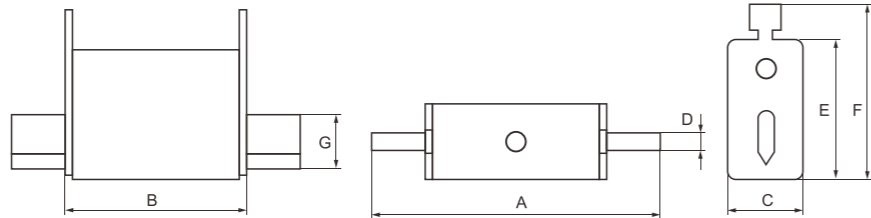

产品型号 Type	额定电压(V) Rated voltage	额定电流(A) Rated current	尺寸Dimension(mm)						
			A	B	C	D	E	F	G
FRM00ZS78	IEC/UL AC690/700V	25~315	78	54	30	6	48	61	15
FRM00ZS78	IEC/UL AC1000V IEC 900V	25~225							

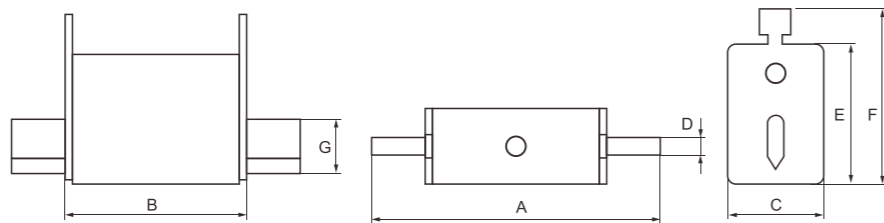


产品型号 Type	额定电压(V) Rated voltage	额定电流(A) Rated current	尺寸Dimension(mm)						
			A	B	C	D	E	F	G
FRM61ZS135	IEC/UL AC690/700V	40~700	135	75	48	6	48	65	20
FRM62ZS150		400~1000	150	75	58	6	58	73	25
FRM63ZS150		500~1400	150	75	71	6	74	86	32

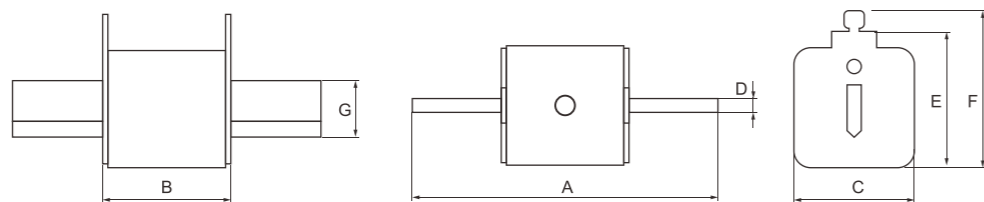

FRB系列MB型圆管螺栓式快速熔断器(Class:aR)
FRB Series MB-type Round Tube Bolted Fast Fuse



产品型号 Type	额定电压(V) Rated voltage	额定电流(A) Rated current	尺寸Dimension(mm)								
			A	B	C	D	E	F	G	H	J
FRB25MB52	UL 130/150V	70~400	73	25	29	57	48	9	18	3.2	13.5
FRB38MB60		500~1000	89	38	32	65	55	10.5	26	6	19
FRB21MB61	UL 250V	35~160	81	21	40	66	56	9	15	3.2	14
FRB31MB67		125~315	88	31	40	72	63	9	22	5	12.5
FRB38MB66		225~600	98	38	40	75	57	10.5	26	6	19
FRB51MB70		450~800	99	51	40	80	60	10.5	38	6	20
FRB21MB61	UL 500V	35~160	81	21	40	66	56	9	15	3.2	14
FRB25MB68		70~225	88	25	44	72	63	9	18	3.2	13.5
FRB31MB70		125~300	91	31	47	75	66	9	22	5	12.5
FRB38MB79		225~500	111	38	53	88	70	10.5	26	6	19
FRB51MB83		450~700	112	51	53	93	73	10.5	38	6	20
FRB63MB107		700~1000	161	63	53	126	90	13.5	50	10	31
FRB75MB126		1000~1400	177	75	82	140	114	16	60	12	29
FRB21MB90	UL 600V	35~100	111	21	70	95	85	9	15	3.2	14
FRB25MB93		70~160	114	25	70	98	89	9	18	3.2	13.5
FRB31MB98		110~250	118	31	74	101	94	9	18	5	12.5
FRB38MB99		125~400	132	38	74	108	91	10.5	26	6	19
FRB51MB106		225~600	135	51	76	116	96	10.5	38	6	20
FRB63MB120		450~900	158	63	78	141	99	13.5	50	10	21
FRB89MB120	1000~1100	184	89	78	141	99	13.5	70	12	21	
FRB21MB89	UL 700V	35~100	109	21	68	94	84	9	15	3.2	14
FRB25MB90		70~160	110	25	66	94	85	9	18	3.2	13.5
FRB38MB98		125~300	130	38	72	106	89	10.5	26	6	19
FRB51MB102		225~500	131	51	72	112	93	10.5	38	6	20
FRB63MB126		450~700	180	63	72	145	110	13.5	50	10	31
FRB75MB126	700~900	177	75	82	140	114	16	60	12	29	
FRB25MB102	UL 1000V	35~125	123	25	79	107	98	9	18	3.2	13.5
FRB38MB108		125~300	141	38	83	117	100	10.5	26	6	19
FRB51MB119		250~500	148	51	89	128	117	10.5	38	6	20
FRB63MB136		500~700	182	63	88	152	128	13.5	50	10	31
FRB89MB136		800~2000	172	89	84	148	118	16	70	12	22

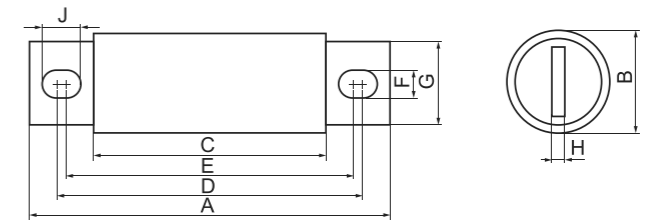

产品型号 Type	额定电压(V) Rated voltage	额定电流(A) Rated current	尺寸Dimension(mm)									
			A	B	C	D	E	F	G	H	J	J1
FRB108MB193	AC500V;DC250V	1400~1600	260	108	82	228	158	44	68	19	13	3
FRB108MB209	AC700V;DC500V	900~1200	275	108	98	244	174	44	89	19	41	3

