INDUCTORS

⊗TDK

Inductors for decoupling circuits Multilayer ferrite MLZ series



MLZ1608 type



FEATURES

- O The MLZ series include inductors for decoupling circuits that have top-class DC superimposition characteristics and low DC resistance.
- O They are compatible with wide frequency band noise, from low to high frequency.
- O W type products are the new standard type products that have both large current and low resistance.
- L type products have a resistance up to 60% lower than W type products.
- Operating temperature range: -55 to +125°C (including self-temperature rise)

APPLICATION

Smart phones, tablet terminals, note PCs, various modules such as camera modules, DSCs, video games, portable memory audio devices, navigation systems, PNDs, WLANs, SSDs

O Application guides: <u>Smart phones/tablets</u>

PART NUMBER CONSTRUCTION

MI	Z	1608	D	R10	D	Т	000
Series	name	L×W×H dimensions 1.6×0.8×0.8 mm	Product internal code	Inductance (µH)	Characteristic type	Packaging style	Internal code

CHARACTERISTICS SPECIFICATION TABLE

Туре	L		L measuring conditions		DC resistance	Isat*1	Itemp*2	Part No.
			Frequency	Current				
	(µH)	Tolerance	(MHz)	(mA)	(Ω)±30%	(mA)	(mA)	
High frequency	0.10	±20%	25	1.0	0.14	700	850	MLZ1608DR10DT000
	0.22	±20%	25	1.0	0.27	550	600	MLZ1608DR22DT000
	0.47	±20%	25	1.0	0.42	400	500	MLZ1608DR47DT000
	1.0	±20%	10	1.0	0.15	190	600	MLZ1608A1R0WT000
	1.5	±20%	10	1.0	0.21	160	550	MLZ1608A1R5WT000
	2.2	±20%	10	1.0	0.25	130	500	MLZ1608A2R2WT000
Lorgo	3.3	±20%	2	0.2	0.33	120	400	MLZ1608M3R3WT000
Large current	4.7	±20%	2	0.2	0.5	120	350	MLZ1608M4R7WT000
current	6.8	±20%	2	0.2	0.74	100	300	MLZ1608M6R8WT000
	10	±20%	2	0.2	1.05	90	250	MLZ1608M100WT000
	15	±20%	2	0.2	1.5	70	200	MLZ1608M150WT000
	22	±20%	2	0.2	2.4	55	150	MLZ1608M220WT000
	1.0	±20%	2	0.2	0.11	140	700	MLZ1608N1R0LT000
	1.5	±20%	2	0.2	0.14	130	600	MLZ1608N1R5LT000
	2.2	±20%	2	0.2	0.18	110	500	MLZ1608N2R2LT000
Low	3.3	±20%	2	0.2	0.27	85	450	MLZ1608N3R3LT000
Low resistance	4.7	±20%	2	0.2	0.32	80	400	MLZ1608N4R7LT000
resistance	6.8	±20%	2	0.2	0.5	80	350	MLZ1608N6R8LT000
	10	±20%	2	0.2	0.6	60	300	MLZ1608N100LT000
	15	±20%	2	0.2	1.02	55	250	MLZ1608N150LT000
	22	±20%	2	0.2	1.65	50	190	MLZ1608N220LT000

*1 Current assumed when inductance ratio has decreased by 50% max..

*2 Current assumed when temperature has risen to 20°C max. (reference value). Operating temperature environment at this time: 105°C max.

Measurement equipment


Measurement item	Product No.	Manufacturer				
L	4294A+16034G	Keysight Technologies				
DC resistance	Type-7561	Yokogawa				
* Equivalent measurement equipment may be used.						



Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
(1/6)
Please note that the contents may change without any prior notice due to reasons such as upgrading.

20190205

L FREQUENCY CHARACTERISTICS

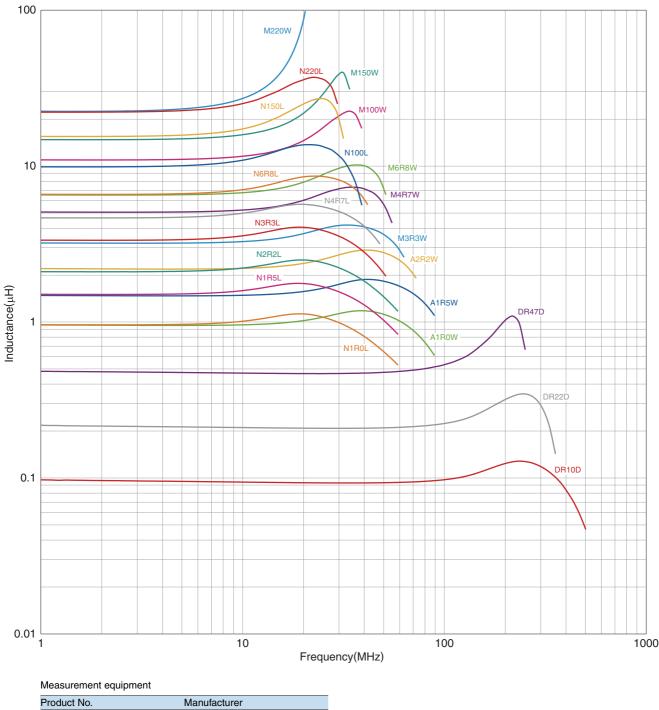


Product No.	Manufacturer
E4991A+16192A	Keysight Technologies

* Equivalent measurement equipment may be used.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (2/6)

20190205

■ INDUCTANCE VS. DC BIAS CHARACTERISTICS

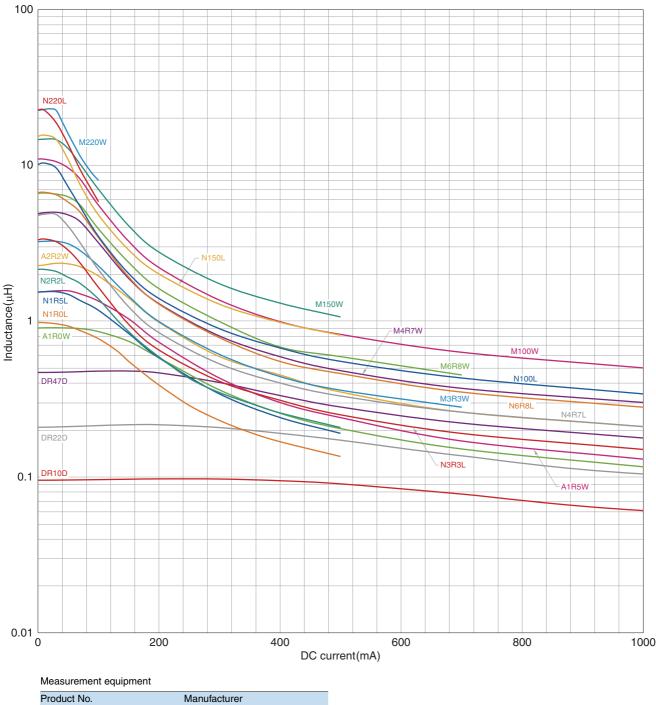


4291B+16200A+16192A Keysight Technologies

* Equivalent measurement equipment may be used.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (3/6) Please note that the contents may change without any prior notice due to reasons such as upgrading.

■ IMPEDANCE VS. FREQUENCY CHARACTERISTICS

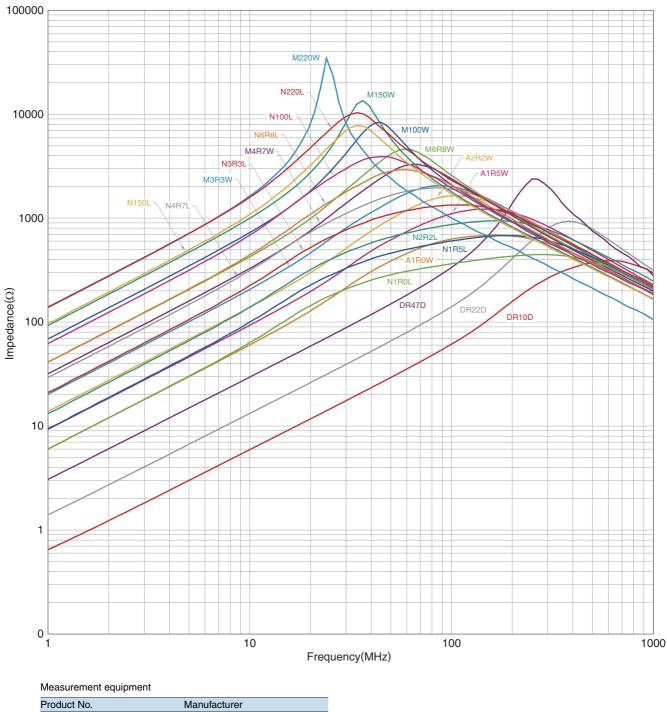


Product No.	Manufacturer				
E4991A+16192A	Keysight Technologies				
* Equivalent measurement equipment may be used.					

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (4/6) Please note that the contents may change without any prior notice due to reasons such as upgrading.


20190205

SHAPE & DIMENSIONS




Dimensions in mm

PACKAGING STYLE





Dimensions in mm

TAPE DIMENSIONS



Dimensions in mm





PACKAGE QUANTITY

Package quantity 4000 pcs/reel


TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating	Storage	Individual	
temperature range*	temperature range**	weight	
–55 to +125 °C	–55 to +125 °C	4 mg	
* • · ·		· .	

Operating temperature range includes self-temperature rise.


** The storage temperature range is for after the assembly.

RECOMMENDED LAND PATTERN



Dimensions in mm

RECOMMENDED REFLOW PROFILE

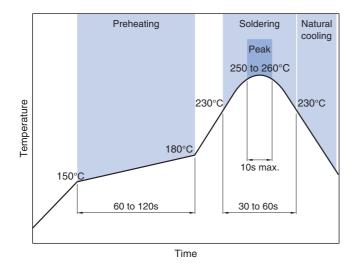

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

▲ REMINDERS ○ The storage period is less than 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. O Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.). Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C. O Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur. O When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions. ○ Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design. Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference. ○ Use a wrist band to discharge static electricity in your body through the grounding wire. O Do not expose the products to magnets or magnetic fields. O Do not use for a purpose outside of the contents regulated in the delivery specifications. O The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us. (1) Aerospace/aviation equipment (8) Public information-processing equipment (2) Transportation equipment (cars, electric trains, ships, etc.) (9) Military equipment (3) Medical equipment (10) Electric heating apparatus, burning equipment (4) Power-generation control equipment (11) Disaster prevention/crime prevention equipment (12) Safety equipment (5) Atomic energy-related equipment (6) Seabed equipment (13) Other applications that are not considered general-purpose (7) Transportation control equipment applications When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (6/6) Please note that the contents may change without any prior notice due to reasons such as upgrading.