



BERNSTEIN
TOOLS FOR ELECTRONICS



**PLIERS –
THEY PERFORM WELL!**

Vers.01

GET IN CONTACT WITH US**BERNSTEIN****Werkzeugfabrik
Steinrücke GmbH**

Industriehof Trecknase 1
42897 Remscheid

Tel. + 49 (0) 2191 - 9650 - 0
Fax + 49 (0) 2191 - 9650 - 30

sales@bernstein-tools.de

VISIT US ON THE WEB

We update our product information on a regular basis and automatically using our Product Information System. This enables the quick and up-to-date compilation of customer-specific data feeds for your own digital sale activities. Take advantage of this service and always keep Bernstein product information up to date!

www.bernstein-tools.de

Product videos and blog posts round off our online offering. Furthermore, we also respect the traditional sales channel via specialist retailers and offer the option to present your webshop as an online sales platform for products by BERNSTEIN.

SYMBOL LEGEND**NEU**

New product



Number of tools in sets



Weight




Dimensions




ESD protection (EPA suitable)



VDE tested



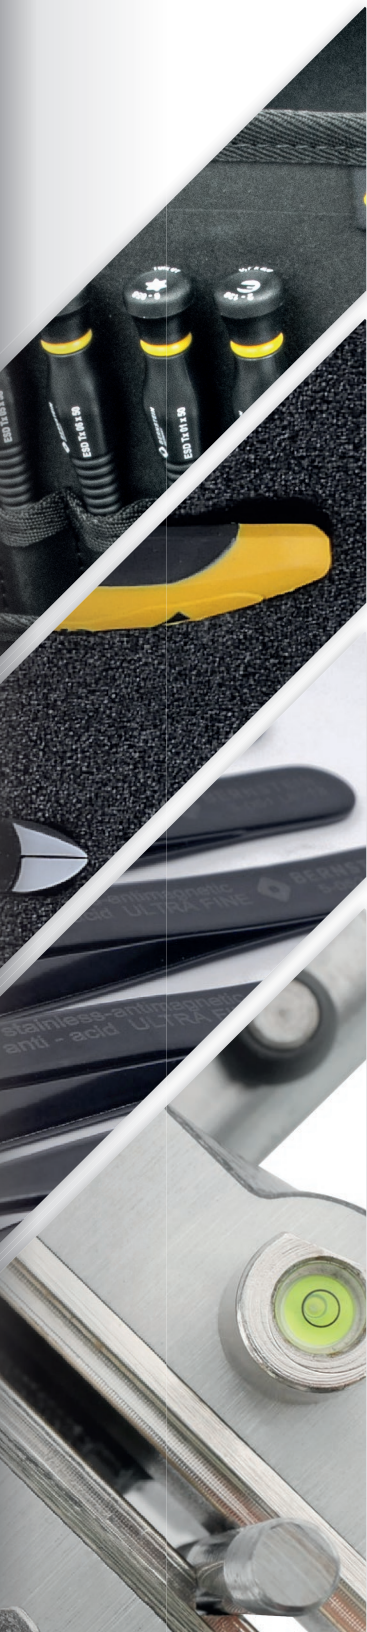

PLIERS – THEY PERFORM WELL!

BERNSTEIN mainly offers electronics pliers for professional demands which are characterised by their consistent quality and a long service life. Our series of pliers differ from each other due to their different production methods and properties.

The EUROLINE, CLASSICline und BLACKline series of pliers are made from high-quality blanks which are hot forged in a die and inserted through the die. The pliers are oil hardened and the tips receive additional inductive hardening.

The TECHNICLINE series of pliers are cut by laser from ball bearing steel and further processed and refined in CNC machining centres, allowing us to achieve a particularly stable microstructure with enormous cutting performance.

This is why our pliers are suitable for cutting all types of wire.

The tensile strength (soft, semi-hard, hard wire) is crucial for common resistance wire, solder wire, winding wire or heating wire (thermocouple wire). Particularly for copper wire, brass wire, steel wire, iron wire, aluminium wire, bond wire, tin wire, nickel wire, gold wire, silver wire, platinum wire, tungsten-copper wire, tungsten wire, glass fibre and even Kevlar.

Please note the cutting value given in the packaging of the pliers as well as the care instructions for a long service life.

DIFFERENCES OF THE PLIERS

MATERIALS

Depending on the model and the requirements, we use high-alloyed tool steels or high-grade ball bearing steel (chrome steel) from selected suppliers.

CONSTRUCTION

We manufacture pliers with four different joint constructions (joint) depending on the application and design of the pliers.

Lay-on joint

The simplest form for joining the two halves of a pair of pliers is the lap joint. Here, the levers are put on top of each other and connected by a hinge pin. This construction is only used for very crude pliers.

Lap joint

For a single joint, the joint surfaces are also milled out so that the halves fit into one another and can be connected using a hinge pin.

Box joint

The most complex construction is the box joint. In a very special process, one lever is passed through the joint of the other lever which is opened using heat. The joint is then pressed together and connected with a pin. This construction ensures the best parallel motion of the tips and an extremely long service life.

Screw joint

The screw joint is manufactured with highly precise joint surfaces, ensuring smooth motion of the pliers and a uniform, low-friction open-close movement. In combination with the basic hardness of the high-quality chrome-vanadium ball bearing steel, the screw design provides a very high cutting performance with a long service life.



LAY-ON JOINT



LAP JOINT



BOX JOINT




SCREWED JOINT

SURFACES

Over the decades we have developed surface properties that meet the wide ranging applications and requirements arising in daily use.


This involves properties such as corrosion protection, hardness, abrasion, spalling, smoothness and surface roughness in order to ensure the optimal work results.




BURNISHED
(free of glare and reflections)



**HIGH-GLOSS
STEEL POLISHED**



**FINE POLISHED AND
GLOSSY BURNISHED**
(free of glare and reflections)



MATT FINISH
(free of glare and reflections)

CUTTING SHAPE AND CUTTING PERFORMANCE

The service life of the cutting tips depends on their sharpness. The sharper the edge (full flush) the quicker the wear. That's why semi-flush pliers are preferable as long as flush or shock-reducing cutting is not required.

Semi flush

This can be used for hard and soft steel wires and soft materials, such as copper wire. The cut leaves a pyramid-like tip at the end of the wire.

Flush

This provides an almost flush cut. It can be used for soft steel wires and copper wire. The cut is slightly shock reduced. It only leaves a very small tip at the end of the wire.

Full flush


This cuts completely flush and provides an extremely sharp cut. It is used exclusively for soft steel wires and copper wire and has a largely shock-reducing cut. It cuts absolutely plane-parallel.

Special flush

This is used to cut glass fibre, Kevlar, etc.

Fitted with carbide insert

Inserted with hard metal tips, designed for constant stress. These are also for tough nickel, electrode and tungsten wires.

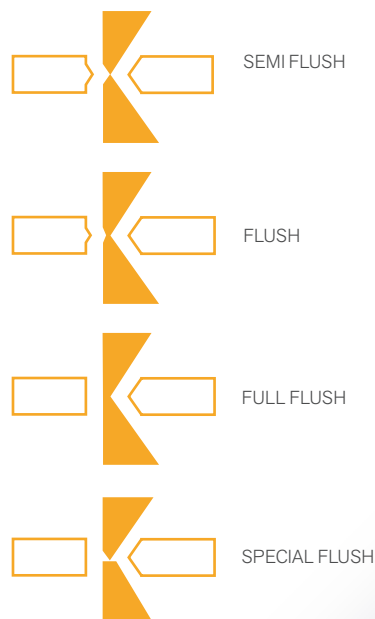

WIRE QUALITIES AND SYMBOLS

(N/mm² = tensile strength)

- soft wire: 220 - 250 N/mm²
- ⊘ medium hard wire: 750 - 800 N/mm²
- hard wire: 1600 - 1800 N/mm²
- Ⓟ Piano wire: 2200 - 2300 N/mm²

ESD ELECTRONIC PLIERS BLACKLINE

The pliers in the BLACKLINE series are characterised by their dip-insulated slender grips. They benefit from a comfortable feel and the pliers do not slip when held. They give the feeling that you are working very close to the workpiece and allow you to control cutting in an optimal manner.

The slim heads are ideal for working on delicate components and feature a highly polished, corrosion-resistant surface.

The smooth, box-jointed or single-jointed construction (depending on the model) guarantees a long service life if cared for properly.

The pliers have been tested with great results in accordance with DIN EN 61340-5-1, 61340-2-1 and 61340-2-3 as well as for work in ESD protected areas.



The following types are available, specifications in mm:

Art.-No.	Short description	Type	Flush	Cutting values				Head width	Cutting length	Total length	Weight in g
				○	◐	●	⊕				
▶ CUTTING PLIERS											
3-901-7	ESD side cutters	–	Semi flush	1.5	1.0	0.4	–	12	10	115	65
3-902-7	ESD side cutters	–	Flush	1.5	1.0	–	–	12	10	120	65
3-905-7	ESD top cutters	–	Flush	0.8	0.6	–	–	13	3 x 20*	135	75
3-906-7	ESD end cutters	–	Flush	0.8	0.6	–	–	13	7 x 25*	125	75
▶ HOLDING PLIERS											
									*jaw length		
3-932-7	ESD flat nose pliers	not serrated jaws	–	–	–	–	–	11.5	21.5	120	60
3-933-7	ESD snipe nose pliers	not serrated jaws	–	–	–	–	–	11.5	23	125	60
3-945-7	ESD snipe nose pliers	serrated jaws	–	–	–	–	–	12.5	12.5	145	85



► 3-960

ESD pliers set BLACKline 4 pcs

320 x 150 x 20 mm

Weight: 345 g

Art.-No.	Content
3-960-0	ESD dissipative bag 4 empty compartments
3-901-7	ESD side cutters BLACKline semi flush 115 mm
3-906-7	ESD end cutters BLACKline flush 125 mm
3-932-7	ESD flat nose pliers BLACKline not serrated jaws 120 mm
3-933-7	ESD snipe nose pliers BLACKline not serrated jaws 125 mm



► 3-960-VB

ESD tool kit BLACKline VARIO 6 pcs

150 x 190 x 80 mm

Weight: 750 g

Art.-No.	Content
5-090-0	ESD tool holder VARIO 8 slots
3-901-7	ESD side cutters BLACKline semi flush 115 mm
3-906-7	ESD end cutters BLACKline flush 125 mm
3-932-7	ESD flat nose pliers BLACKline not serrated jaws 120 mm
3-933-7	ESD snipe nose pliers BLACKline not serrated jaws 125 mm
5-078-13	ESD SMD universal tweezers 130 mm form PSF stainless steel, dissipative
5-055-13	ESD SMD tweezers 120 mm form 7a stainless steel angle 40°, dissipative













ESD ELECTRONIC PLIERS CLASSICLINE

The pliers in the CLASSICLINE series are characterised by their high-gloss electropolished surface, which is very resistant to corrosion, without friction and microcracks, extremely smooth and free of particles. The heads are ideal for working on small components.

The pliers sit perfectly in the hand thanks to their two-component protective covering, which is ergonomically shaped, dissipative and features an individually adjustable double leaf spring. The smooth box joint guarantees a long service if cared for properly.

The pliers have been tested with great results in accordance with DIN EN 61340-5-1, 61340-2-1 and 61340-2-3, as well as for work in ESD protected areas.



The following types are available, specifications in mm:

Art.-No.	Short description	Type	Flush	○	◐	●	⊕	Head width	Cutting length	Total length	Weight in g
▶ CUTTING PLIERS											
3-601-15	ESD side cutters	–	Semi flush	1.5	1.1	0.5	–	11	13	115	65
3-602-15	ESD side cutters	–	Flush	1.5	1.1	–	–	11	13	115	65
3-603-15	ESD side cutters	–	Semi flush	1.3	1.0	0.4	–	11	13	115	65
3-604-15	ESD side cutters	–	Flush	1.3	0.8	–	–	11	13	115	65
3-606-15	ESD side cutters	–	Flush	0.6	0.8	–	–	10.5	6	120	55
3-625-15	ESD oblique top cutters	–	Flush	1.5	0.8	0.8	–	11	11	120	90
3-627-15	ESD top cutters	–	Flush	1.5	0.8	0.5	–	11	11	120	90
▶ HOLDING PLIERS											
									jaw length		
3-631-15	ESD round nose pliers	not serrated jaws	–	–	–	–	–	10	20	120	55
3-632-15	ESD flat nose pliers	not serrated jaws	–	–	–	–	–	9	18.5	120	55
3-633-15	ESD snipe nose pliers	not serrated jaws	–	–	–	–	–	9.5	17.5	120	55
3-634-15	ESD snipe nose pliers	not serrated jaws	–	–	–	–	–	9.5	22.5	120	55

▶ **3-650-V****ESD pliers set CLASSICline VARIO 5 pcs**

150 x 190 x 80 mm

Weight: 750 g

Art.-No.	Content
5-090-0	ESD tool holder VARIO 8 slots
3-601-15	ESD side cutters CLASSICline semi flush 115 mm
3-631-15	ESD round nose pliers CLASSICline not serrated jaws 120 mm
3-632-15	ESD flat nose pliers CLASSICline not serrated jaws 120 mm
3-633-15	ESD snipe nose pliers CLASSICline not serrated jaws 120 mm
3-634-15	ESD snipe nose pliers CLASSICline not serrated jaws 120 mm

▶ **3-960-VC****ESD tool kit CLASSICline VARIO 6 pcs**

150 x 180 x 80 mm

Weight: 700 g

Art.-No.	Content
5-090-0	ESD tool holder VARIO 8 slots
3-601-15	ESD side cutters CLASSICline semi flush 115 mm
3-606-15	ESD side cutters CLASSICline flush 120 mm
3-632-15	ESD flat nose pliers CLASSICline not serrated jaws 120 mm
3-633-15	ESD snipe nose pliers CLASSICline not serrated jaws 120 mm
5-078-13	ESD SMD universal tweezers 130 mm form PSF stainless steel dissipative
5-055-13	ESD SMD tweezers 120 mm form 7a stainless steel angle 40° dissipative

▶ **3-960-C****ESD pliers set CLASSICline 4 pcs**

320 x 150 x 20 mm

Weight: 380 g

Art.-No.	Content
3-960-0	ESD dissipative bag 4 empty compartments
3-601-15	ESD side cutters CLASSICline semi flush 115 mm
3-606-15	ESD side cutters CLASSICline flush 120 mm
3-632-15	ESD flat nose pliers CLASSICline not serrated jaws 120 mm
3-633-15	ESD snipe nose pliers CLASSICline not serrated jaws 120 mm



ESD ELECTRONIC PLIERS EUROLINE



The pliers in the EUROLINE series are characterised by the precision in manufacturing. The delicate, highly precise heads are produced by hand in a series of work steps. They are highly suitable for working on the smallest components or for cutting fine, strong wires. The high-gloss burnished surface guarantees resistance to corrosion and glare-free, fatigue-free work under the magnifier or microscope. The pliers sit perfectly in the hand thanks to their two-component protective covering, which is ergonomically shaped, dissipative and features an individually adjustable double leaf spring. The smooth box joint guarantees a long service if cared for properly.

The pliers have been tested with great results in accordance with DIN EN 61340-5-1, 61340-2-1 and 61340-2-3, as well as for work in ESD protected areas.



▶ 3-960-E

ESD pliers set EUROLINE 4 pcs

320 x 150 x 20 mm

Weight: 375 g

Also available as ESD dissipative zipper pocket Art.-No. 3-680.

Art.-No.	Content
3-960-0	ESD dissipative bag 4 empty compartments
3-651-15	ESD mini side cutters EUROLINE flush 120 mm
3-672-15	ESD end cutters EUROLINE flush 130 mm
3-682-15	ESD flat nose pliers EUROLINE not serrated jaws 130 mm
3-683-15	ESD snipe nose pliers EUROLINE not serrated jaws 130 mm



▶ 3-960-VE

ESD tool kit EUROLINE VARIO 6 pcs

150 x 190 x 80 mm

Weight: 750 g

Art.-No.	Content
5-090-0	ESD tool holder VARIO 8 slots
3-651-15	ESD mini side cutters EUROLINE flush 120 mm
3-672-15	ESD end cutters EUROLINE flush 130 mm
3-682-15	ESD flat nose pliers EUROLINE not serrated jaws 130 mm
3-683-15	ESD snipe nose pliers EUROLINE not serrated jaws 130 mm
5-078-13	ESD SMD universal tweezers 130 mm form PSF stainless steel dissipative
5-055-13	ESD SMD tweezers 120 mm form 7a stainless steel angle 40° dissipative






▶ 3-960-ES


ESD pliers set EUROLINE 3 pcs

without container, loosely packed

Weight: 200 g

Art.-No.	Content
3-651-15	ESD mini side cutters EUROLINE flush 120 mm
3-672-15	ESD end cutters EUROLINE flush 130 mm
3-683-15	ESD snipe nose pliers EUROLINE not serrated jaws 130 mm



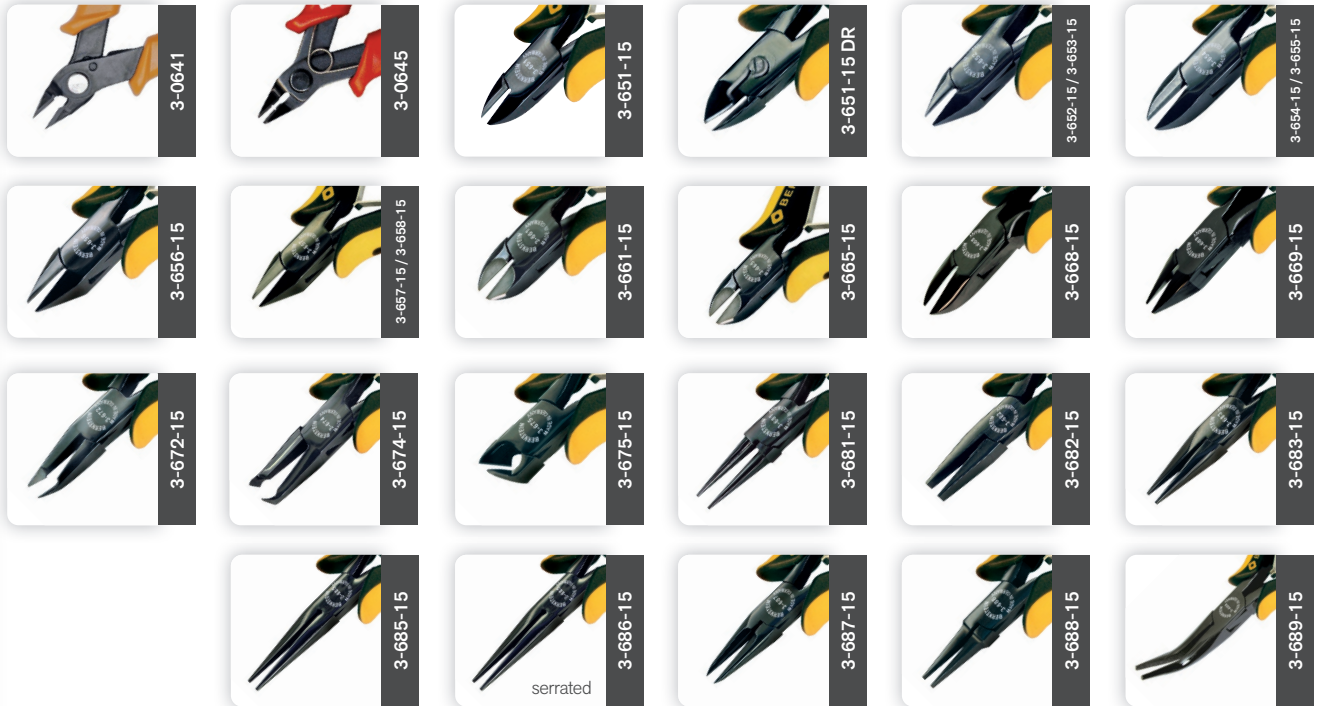

The following types are available, specifications in mm:

Art.-No.	Short description	Type	Flush	Cutting values				Head width	Cutting length	Total length	Weight in g
				○	◐	●	Ⓟ				
▶ CUTTING PLIERS											
3-0641	ESD mini side cutters		Full flush	1	0	0	0	10	10	130	0
3-0645	Stripping mini side cutters		Full flush	0,8	0	0	0	10	8	130	80
3-651-15	ESD mini side cutters	-	Flush	1.5	0.8	-	-	10	9.5	120	65
3-651-15 DR	ESD mini side cutters	with wire holder	Flush	1.5	0.8	-	-	10	9.5	120	65
3-652-15	ESD mini side cutters	-	Flush	1.5	0.8	-	-	10	10	120	60
3-653-15	ESD mini side cutters	concave	Flush	1.5	0.8	-	-	10	10	120	60
3-654-15	ESD side cutters	-	Semi flush	1.5	1.0	0.4	-	11	13	125	70
3-655-15	ESD side cutters	-	Flush	1.5	1.0	-	-	11	13	125	70
3-656-15	ESD side cutters	-	Semi flush	1.5	1.0	0.3	-	11	13	125	70
3-657-15	ESD side cutters	-	Flush	1.5	1.0	-	-	11	13	125	70
3-658-15	ESD side cutters	-	Full flush	1.5	0.6	-	-	11	13	125	70
3-661-15	ESD mini side cutters	with carbide insert	Semi flush	2.0	1.5	1.0	0.6	11	10	120	70
3-665-15	ESD mini side cutters	with carbide insert	Special flush	only for glass fibre 2.0				11	10	120	65
3-668-15	ESD side cutters	-	Semi flush	2.0	1.5	0.7	-	14	17	135	110
3-669-15	ESD side cutters	-	Flush	2.0	1.5	-	-	14	17	135	110
3-672-15	ESD end cutters	-	Flush	0.8	0.6	-	-	10	5	130	70
3-674-15	ESD top cutters	-	Semi flush	0.8	0.6	-	-	10	5	130	60
3-675-15	ESD oblique top cutters	-	Flush	1.2	1.0	0.4	-	10	10	115	65
▶ HOLDING PLIERS											
									jaw length		
3-681-15	ESD round nose pliers	not serrated jaws	-	-	-	-	-	10	20	130	65
3-682-15	ESD flat nose pliers	not serrated jaws	-	-	-	-	-	10	20	130	70
3-683-15	ESD snipe nose pliers	not serrated jaws	-	-	-	-	-	10	23	130	70
3-685-15	ESD snipe nose pliers	not serrated jaws	-	-	-	-	-	10	32	140	70
3-686-15	ESD snipe nose pliers	serrated jaws	-	-	-	-	-	10	32	140	70
3-687-15	ESD snipe nose pliers	not serrated jaws	-	-	-	-	-	10	19	130	70
3-688-15	ESD flat nose pliers	not serrated jaws	-	-	-	-	-	8.5	18	130	60
3-689-15	ESD snipe nose pliers	not serrated jaws	-	-	-	-	-	12	39	145	70

ESD ELECTRONIC PLIERS TECHNICLINE



The pliers in the TECHNICLINE series are characterised by their exceptional cutting performance. The precisely symmetrical, induction-hardened cutting edges have a hardness of 63-65 HRC and thus achieve particularly high cutting values, making them suitable for hard and special wires (HRC 81 made of tungsten carbide steel is also available on request). The matt-polished surface is scratch proof, glare free and non reflective.

The pliers sit perfectly in the hand thanks to their two-component protective covering, which is ergonomically shaped, dissipative and features an individually adjustable double leaf spring. The smooth screw joint can be readjusted, guaranteeing a long service life if cared for properly. OBSERVE THE CARE INSTRUCTIONS

The pliers have been tested with great results in accordance with DIN EN 61340-5-1, 61340-2-1 and 61340-2-3, as well as for work in ESD protected areas.



The following types are available, specifications in mm:



Art.-No.	Short description	Type	Flush	Cutting values				Head width	Cutting length	Total length	Weight in g
CUTTING PLIERS											
3-961-15	ESD side cutters	–	Semi flush	1.2	1.0	0.6	–	10	8	120	75
3-963-15	ESD side cutters	–	Full flush	1.0	0.8	–	–	10	8	120	75
3-964-15	ESD side cutters	–	Semi flush	1.2	1.0	0.6	–	10	8	120	75
3-966-15	ESD side cutters	–	Full flush	1.0	0.9	–	–	10	8	120	75
3-967-15	ESD side cutters	–	Semi flush	1.2	1.0	–	–	10	8	120	75
3-969-15	ESD side cutters	–	Full flush	0.8	0.4	–	–	10	8	120	75
3-971-15	ESD side cutters	–	Semi flush	1.6	1.3	0.7	–	12.5	10	125	80
3-973-15	ESD side cutters	–	Full flush	1.6	1.0	–	–	12.5	10	125	80
3-981-15	ESD end cutters	–	Full flush	0.8	0.6	–	–	10	20	135	80
3-985-15	ESD oblique top cutters	–	Flush	1.2	1.0	–	–	10	6.4	130	80
HOLDING PLIERS											
											jaw length
3-991-15	ESD round nose pliers	not serrated jaws	–	–	–	–	–	10	20	130	75
3-992-15	ESD flat nose pliers	not serrated jaws	–	–	–	–	–	10	20	130	75
3-996-15	ESD snipe nose pliers	not serrated jaws	–	–	–	–	–	10	30	140	80

* All side cutters as tungsten carbide cutters (HRC 81 for hart wires) available on request.

► Wire holder

Wire catchers prevent the wire from falling between assemblies and components on circuit boards or into circuits. These cut wire pieces can cause serious damage. Suitable for side cutters for easy manual retrofitting.

Art.-No.	Side cutters for Art.-No.	For head width in mm	Weight in g
3-999-1	Art.-No. 3-961-15 to 3-696-15	10.0	9
3-999-2	Art.-No. 3-971-15 to 3-973-15	12.5	9



► 3-960-VT

ESD tool kit TECHNICLINE VARIO 6 pcs

150 x 190 x 80 mm

Weight: 750 g

Art.-No.	Content
5-090-0	ESD tool holder VARIO 8 slots
3-963-15	ESD side cutters TECHNICLINE full flush 120 mm
3-981-15	ESD end cutters TECHNICLINE full flush 135 mm
3-992-15	ESD flat nose pliers TECHNICLINE not serrated jaws 130 mm
3-996-15	ESD snipe nose pliers TECHNICLINE not serrated jaws 140 mm
5-078-13	ESD SMD universal tweezers 130 mm form PSF stainless steel dissipative
5-055-13	ESD SMD tweezers 120 mm form 7a stainless steel angle 40° dissipative



► 3-970

ESD pliers set TECHNICLINE 4 pcs

190 x 135 x 35 mm

Weight: 545 g

Art.-No.	Content
3-680-0	ESD dissipative bag 4 empty compartments
3-963-15	ESD side cutters TECHNICLINE full flush 120 mm
3-971-15	ESD side cutters TECHNICLINE semi flush 125 mm
3-992-15	ESD flat nose pliers TECHNICLINE not serrated jaws 130 mm
3-996-15	ESD snipe nose pliers TECHNICLINE not serrated jaws 140 mm



► 3-970-T

ESD pliers set TECHNICLINE 4 pcs

320 x 150 x 20 mm

Weight: 410 g Also available as ESD dissipative zipper pocket (Art.-No. 3-970)

Art.-No.	Content
3-960-0	ESD dissipative bag 4 empty compartments
3-963-15	ESD side cutters TECHNICLINE full flush 120 mm
3-971-15	ESD side cutters TECHNICLINE semi flush 125 mm
3-992-15	ESD flat nose pliers TECHNICLINE not serrated jaws 130 mm
3-996-15	ESD snipe nose pliers TECHNICLINE not serrated jaws 140 mm



ROBUST PLIERS




Material Q & T steel according to DIN
Cutting edges inductively hardened
The following types are available, specifications in mm:

Art.-No.	Short description	Type	Flush	Cutting values				Head width	Cutting/ jaw length	Total length mm	Weight in g
				○	⊘	●	Ⓟ				
3-235-16	Telephone pliers	serrated jaws	-	-	-	-	-	15	55	160	145
3-245-16	Telephone pliers	serrated jaws	-	-	-	-	-	18	75	205	210
3-255-16	Telephone pliers	serrated jaws	-	-	-	-	-	18	70	205	210
3-531-16	Flat nose pliers	serrated jaws	-	-	-	-	-	15	40	150	105
3-132-16	Side cutters	-	Full flush	4.0	2.3	1.5	-	15	16	130	125
3-133-16	Side cutters	-	-	4.0	2.5	1.8	-	18	18	150	155
3-732-16	Combination pliers	serrated jaws	-	4.0	2.5	2.0	-	23	35	170	205



The pliers of this program have been successfully tested by several testing laboratories according to DIN EN 61340-5-1, 61340-2-1, as well as 61340-2-3 for work in ESD-protected areas.

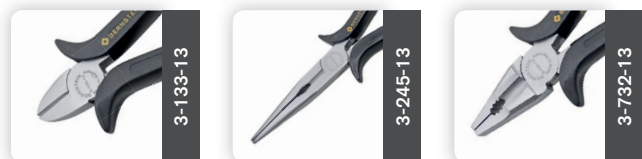

The following types are available, specifications in mm:

Art.-No.	Short description	Type	Flush	Cutting values				Head width	Cutting/ jaw length	Total length mm	Weight in g
				○	⊘	●	Ⓟ				
3-133-13	ESD side cutters	-	Semi flush	4.0	2.5	1.8	-	18	18	145	165
3-245-13	ESD telephone pliers	serrated jaws	Semi flush	-	-	-	-	18	75	200	180
3-732-13	ESD combination pliers	serrated jaws	Semi flush	4.0	2.5	1.8	-	23	35	165	185


PLIERS WITH SPECIAL REQUIREMENTS

▶ 3-573

Water pump pliers 180mm with push-button

Size adjustable at the push of a button - thanks to the push button.
With extra slim head for hard-to-reach places
and protective, non-slip handles.

Total length: 180 mm, weight: 170 g

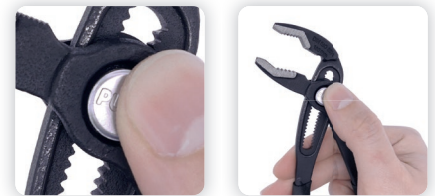

▶ 3-575-6

Water pump pliers 240 mm

Water pump pliers 240 mm, very stable, dip insulated, non-slip handles.

Total length: 240 mm, weight: 380 g



▶ 3-0641

Mini side cutters full flush for CU-wire up to Ø 1.0 mm

Elektronik Seitenschneider mit Feder, ohne Schneidwate, für CU-Drähte bis Ø 1,0 mm / 18 AWG.

Gesamtlänge: 135 mm, Gewicht: 70 g



▶ 3-0645

Stripping side cutters full flush for CU-Wire up to Ø 0.8 mm

Stripping side cutter standard version, with spring, without cutting edge,
for CU wires up to Ø 0.8 mm / 22-26 AWG.

Total length: 130 mm, weight: 80 g



▶ 3-0648

Cable cutter up to Ø 10.5 mm with lock function

especially for coaxial cables, robust design, spring and locking device,
not for steel wire

Total length: 170 mm, weight: 155 g



TERMS OF SALE AND DELIVERY

GENERAL

The nature and scope of delivery are specified in the order confirmation. The following delivery terms shall apply to all deliveries to be carried out by us. Purchasing conditions of the customer do not oblige us, even if we do not expressly contradict this. Verbal or by intercom agreements made require our written confirmation. Obvious mistakes in offers, order confirmations, etc. are expressly reserved and can be considered at any time. We are entitled to process any data relating to the business relationship or in connection with the same concerning buyers, whether the buyer itself or third parties, within the framework of the Federal Data Protection Act.

OFFER

Our offers are permissive, an order is deemed to be granted if confirmed by us in writing. PRICES, DELIVERY BASIS AND PACKAGING Unless otherwise agreed, the prices in Euros, ex works, are exclusive packaging. In the case of special packaging regulations of the customer, the additional costs involved are invoiced. Packaging is not accepted.

DELIVERY

The delivery takes place at the expense and risk of the buyer without regard to who bears the freight costs. We reserve the right to place orders in partial deliveries. For custom-made products, excess or short deliveries of up to 10% are permitted.

DELIVERY TIME

The delivery time begins upon receipt of all information required for the execution of the order. We endeavor to comply with the delivery time specified in the order confirmation. No claims of any kind can be asserted from a delayed delivery.

COMPLAINTS

Complaints can only be accepted within 8 days after receiving of the goods.

The shape and colour of the tool may differ from the item shown in the catalogue.

GUARANTEE

For all BERNSTEIN tools, which are unusable due to proven material or manufacturing defects, we deliver within one year after deliver a replacement. This free replacement service is excluded if the tools have become unusable due to natural wear or improper handling.

DISCLAIMER

We do not assume any guarantee for the suitability of our products for the intended purpose of the customer. For damages caused by unsuitable or improper use, commissioning by the customer or third parties, and for the natural wear and tear we assume no guarantee. Any claims for damages, irrespective of the legal basis, as well as, in particular, the liability by tort (product liability) are excluded to the extent permitted by law.

PAYMENT

Our invoices are payable within 10 days of the invoice date with 2% discount or in 30 days net, unless otherwise agreed in the order confirmation.

RESERVATION OF TITLE

We reserve the title to all goods delivered by us until the buyer has paid all claims arising from the business relationship. The buyer is entitled to resell the reserved goods in ordinary business transactions. In the case of resale, the buyer has to reserve the ownership of the sold goods on the same terms as his customer. The purchaser hereby assigns to us the purchase price claim against the buyer from the resale.

FULFILLMENT AND JURISDICTION

Place of performance and jurisdiction for delivery and payment is Remscheid. In any case, only German law shall apply, with the exclusion of any foreign law.

ONLINE DISPUTE RESOLUTION

The European Commission provides a platform for online dispute resolutions (ODR) which can be accessed at

<https://ec.europa.eu/consumers/odr/>.

In order to settle dispute arising from a contractual relationship with a consumer or from whether such a contractual relationship exists at all, we will participate in dispute settlement proceedings before a consumer dispute resolution body. Consumers can contact their national European Consumer Centre in this regard. The respective contact details of the individual ECCs can be found at

<https://www.evz.de/en/alternative-dispute-resolution/adr-in-europe/>.



A little story about
the word amber (BERNSTEIN)

The greek word for amber is „elektron“: the root of today's term electronics. Even the greeks discovered the special feature of amber: by rubbing the natural amber can be electrostatically charged. The charged stone can attract dust particles.

Today you can use this property to check the authenticity of an amber. If it is real, it can be tested through charge rubbing on a cotton cloth.

You can also wear it as jewellery:
it should protect from evil magic and give joy of life.

Just like our high-quality BERNSTEIN
ESD Tools - them protect against
electrostatics and give joy with
the daily work.

(Autor Max Walter Hartmut Blombach)

BERNSTEIN

**Werkzeugfabrik
Steinrücke GmbH**

Industriehof Trecknase 1
42897 Remscheid

Tel. + 49 (0) 2191 - 9650 - 0
Fax + 49 (0) 2191 - 9650 - 30

sales@bernstein-tools.de
www.bernstein-tools.de