




~DIN 933

~ISO 4017

Standard withdrawn

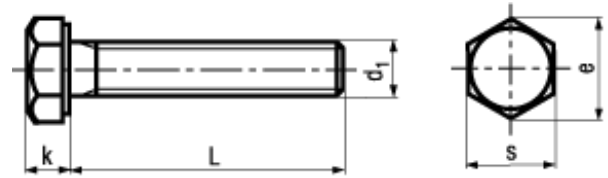

BN 502

Hex head screws

fully threaded

Brass

plain

- ~UNI 5739
- ~ČSN 021103

M10; M12: wrench size according to ISO on request

Article#	d ₁	e	k	s	L
1158139	M3	6,01	2	5,5	5
1158147					6
1158155					8
1158163					10
1158171					12
1158201					16
1158236					20
1158260	M4	7,66	2,8	7	6
1192744					8
1192752					10
1192760					12
1192787					16
1192809					20
1192817					25
1158295					30
1158309					35
1192841					40
1158317	M5	8,79	3,5	8	6
1192884					8
1192892					10
1192906					12
1192922					16
1192949					20
1192957					25
1192965					30

M10; M12: wrench size according to ISO on request

Article#	d ₁	e	k	s	L
1158341	M5	8,79	3,5	8	35
1192981					40
1158368					45
1158376					50
1193023					60
1193031	M6	11,05	4	10	8
1193058					10
1193066					12
1193082					16
1193104					20
1193112					25
1193120					30
1158597					35
1193147					40
1158600					45
1158619					50
1158627					60
1193198					70
1193201	M8	14,38	5,3	13	10
1193228					12
1193244					16
1193260					20
1193279					25
1193287					30
1193295					35
1193309					40
1193317					45
1193325					50
1193333					60
1193341					70
1193368					80
1193414	M10	18,9	6,4	17	16
1193430					20
1193449					25
1193457					30
1158651					35
1193473					40
1158678					45
1193503					50
1193511					60
1158686					70

M10; M12: wrench size according to ISO on request

Article#	d ₁	e	k	s	L
1193562	M10	18,9	6,4	17	80
1193570					100
1193597	M12	21,1	7,5	19	16
1193600					20
1193619					25
1193627					30
1158694					35
1193643					40
1159135					45
1193678					50
1193686					60
1159186					70
1193708					80
1159232	M16	26,75	10	24	25
1159240					30
1159259					35
1159267					40
1159275					45
1159291					50
1159283					60
1159305					70
1159313					80
1159348	M20	33,53	12,5	30	30
1159356					40
1159364					50
1159372					60