


U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINTOP® STR-M	29.11.2013

For the benefits, refer to SKINTOP® ST-M



Wide clamping range




Maximum vibration protection



Mechanical resistance



Assembly time



Optimum strain relief



Temperature-resistant



Variety of approval certifications

Info

Now with IP 69 K approval! Proven to withstand the most demanding cleaning procedures for industrial machinery with high-pressure cleaners and hot water!

Application range

With reducing seal insert, to seal cables with smaller outer diameters.

Design

Metric connection thread acc. to EN 50262

Norm references / Approvals

UL File Nr. E79903

Note

Refer to SKINTOP® metric accessories for suitable accessories

Counter nut to be used: SKINTOP® GMP-GL-M


SKINTOP® STR M ISO types have an extra-long connection thread

SKINTOP® STR M ISO versions with extra-long connection thread, see table, no DNV approval

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Product Management	Document: LAPP_PRO977EN.pdf	1 / 5
--------------------	-----------------------------	-------

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
	SKINTOP® STR-M	29.11.2013

Technical Data

Caution:	Refer to Appendix T21 for the installation dimensions and torques
Colour delivered:	Silver grey (RAL 7001) Light grey (RAL 7035) Black (RAL 9005), UV-resistant
Material:	Body: Polyamide Seal: CR
Tests:	GGVS: TÜ.EGG.020-95
Protection rating:	IP 68 - 5 bar IP 69 K
Temperature range:	Fixed: -40°C to +100°C Dynamic: -20°C to +100°C

Product Management	Document: LAPP_PRO977EN.pdf	2 / 5
--------------------	-----------------------------	-------

SKINTOP® STR-M

29.11.2013


Part number	Article designation / size	Clamping range ØF (mm)	SW (mm)	Overall length/ C (mm)	Thread length/ D (mm)
SKINTOP® STR-M silver grey					
53111100	STR-M 12 x 1,5	1-5	15	30.0	8.0
53111110	STR-M 16 x 1,5	2-7	19	34.0	8.0
53111120	STR-M 20 x 1,5	5-10	25	37.0	9.0
53111130	STR-M 25 x 1,5	6-13	30	40.0	10.0
53111140	STR-M 32 x 1,5	7-15	36	47.0	10.0
53111150	STR-M 40 x 1,5	15-23	46	52.0	10.0
53111160	STR-M 50 x 1,5	22-29	55	62.0	12.0
53111170	STR-M 63 x 1,5	28-39	66	71.0	12.0
SKINTOP® STR-M black					
53111300	STR-M 12 x 1,5	1-5	15	30.0	8.0
53111310	STR-M 16 x 1,5	2-7	19	34.0	8.0
53111320	STR-M 20 x 1,5	5-10	25	37.0	9.0
53111330	STR-M 25 x 1,5	6-13	30	40.0	10.0
53111340	STR-M 32 x 1,5	7-15	36	47.0	10.0
53111350	STR-M 40 x 1,5	15-23	46	52.0	10.0
53111360	STR-M 50 x 1,5	22-29	55	62.0	12.0
53111370	STR-M 63 x 1,5	28-39	66	71.0	12.0
SKINTOP® STR-M light grey					
53111500	STR-M 12 x 1,5	1-5	15	30.0	8.0
53111510	STR-M 16 x 1,5	2-7	19	34.0	8.0
53111520	STR-M 20 x 1,5	5-10	25	37.0	9.0
53111530	STR-M 25 x 1,5	6-13	30	40.0	10.0
53111540	STR-M 32 x 1,5	7-15	36	47.0	10.0
53111550	STR-M 40 x 1,5	15-23	46	52.0	10.0
53111560	STR-M 50 x 1,5	22-29	55	62.0	12.0
53111570	STR-M 63 x 1,5	28-39	66	71.0	12.0
SKINTOP® STR M ISO silver-grey (with long metric connecting thread)					
53017110	STR M 16 x 1,5	2-6	19	40.0	12.0
53017130	STR M 20 x 1,5	4-9	24	45.0	13.0
53017140	STR M 25 x 1,5	6-12	27	47.0	13.0




SKINTOP® STR-M

29.11.2013

Part number	Article designation / size	Clamping range ØF (mm)	SW (mm)	Overall length/ C (mm)	Thread length/ D (mm)
SKINTOP® STR M ISO black (with long metric connecting thread)					
53017310	STR M 16 x 1,5	2-6	19	40.0	12.0
53017330	STR M 20 x 1,5	4-9	24	45.0	13.0
53017340	STR M 25 x 1,5	6-12	27	47.0	13.0

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINTOP® STR-M	29.11.2013

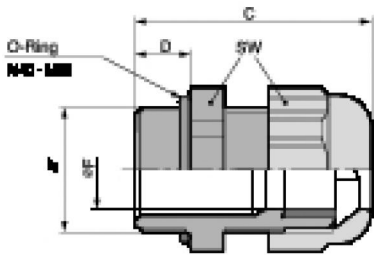

Product Management	Document: LAPP_PRO977EN.pdf	5 / 5
--------------------	-----------------------------	-------