


KEMET, SSHB10HS, Commercial Grade, 1900 uH

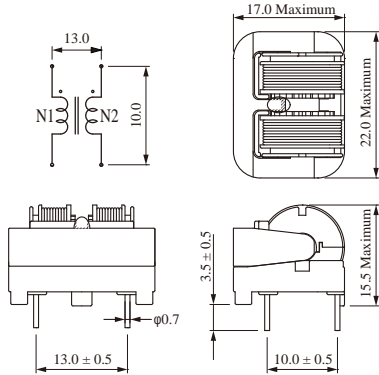

| Dimensions |                |
|------------|----------------|
| L          | 22mm MAX       |
| T          | 17mm MAX       |
| H          | 15.5mm MAX     |
| S          | 10mm +/-0.5mm  |
| S1         | 13mm NOM       |
| LL         | 3.5mm +/-0.5mm |
| F          | 0.7mm NOM      |

| Packaging Specifications |      |
|--------------------------|------|
| Weight:                  | 10 g |
| Packaging:               | Tray |
| Packaging Quantity:      | 300  |

| General Information |   |
|---------------------|---|
| Series:             | SSHB10HS  |
| Style:              | Through-Hole Choke  |
| Description:        | Common Mode Filter, SS Coils, SSHB10HS, Wide Range Impedance Type |
| RoHS:               | Yes   |
| Miscellaneous:      | Temperature Rise Maximum: 50 K                                    |
| Notes:              | Marking: 17 Lot No.   |

| Specifications         |                 |
|------------------------|-----------------|
| Inductance:            | 1.9 mH (10 kHz) |
| Temperature Range:     | -25/+120C       |
| Rated Temperature:     | 120C            |
| Current:               | 1.7 Amps        |
| Voltage AC:            | 250 VAC         |
| Withstanding Voltage:  | 2400 VAC MAX    |
| Insulation Resistance: | 100 MOhms       |